


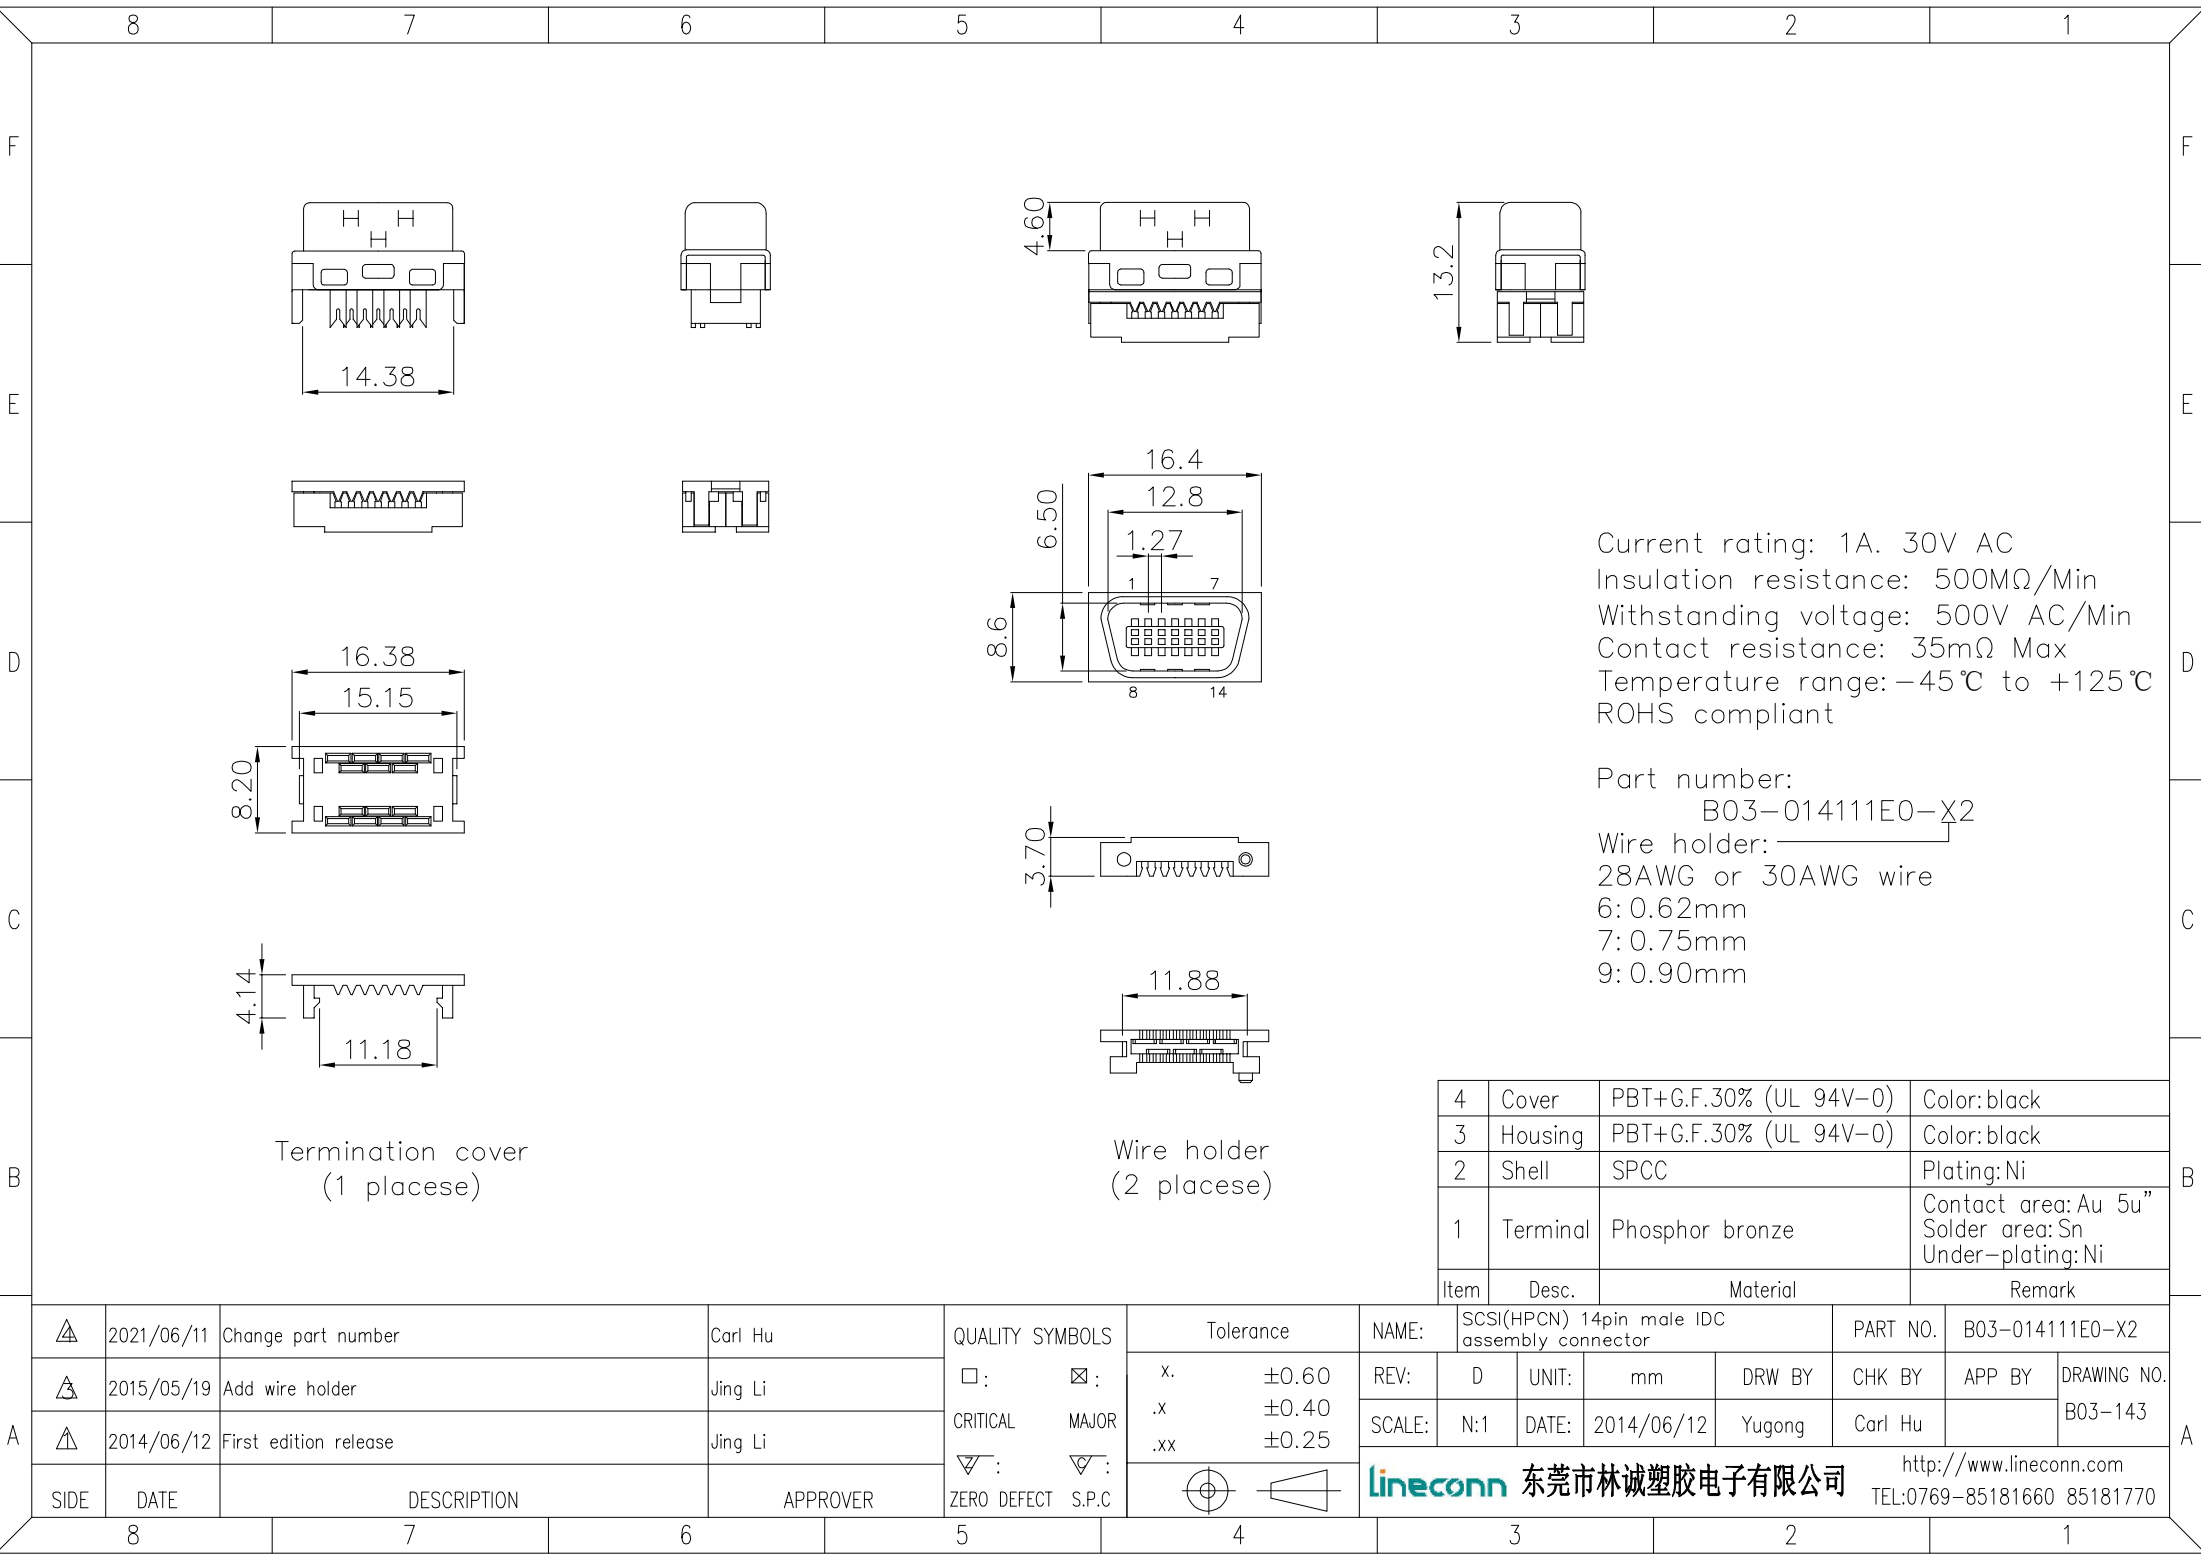

Current rating: 1A. 30V AC
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +125℃
ROHS compliant

Part number:
B03-014111E0-X2
Wire holder:
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A		2021/06/11	Change part number	Carl Hu	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME: SCSI(HPCN) 14pin male IDC assembly connector		PART NO.		B03-014111E0-X2		A		
		2015/05/19	Add wire holder	Jing Li		x. ±0.60	REV: D	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-143				
		2014/06/12	First edition release	Jing Li		.x ±0.40	SCALE: N:1	DATE: 2014/06/12	Yugong	Carl Hu						
	SIDE		DATE	DESCRIPTION		APPROVER	 		lineconn 东莞市林诚塑胶电子有限公司						http://www.lineconn.com	
									TEL:0769-85181660 85181770							
8		7		6		5		4		3		2		1		