

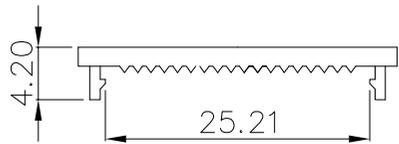
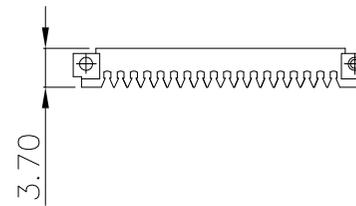


Current rating: 1A, 30V AC
 Insulation resistance: 500MΩ/Min
 Withstanding voltage: 500V AC/Min
 Contact resistance: 35mΩ Max
 Temperature range: -45°C to +125°C
 ROHS compliant

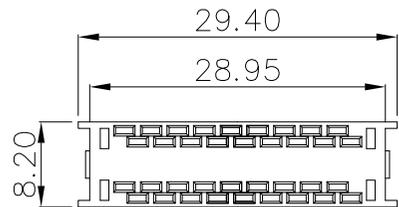

Part number:
 B03-036111E0-X0
 Wire holder:
 28AWG or 30AWG wire
 6: 0.62mm
 7: 0.75mm
 9: 0.90mm

Termination cover
(1 places)

Wire holder
(2 places)

4	Cover	PBT+G.F.30% (UL 94V-0)	Color:black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/11	Change part number	Carl Hu
△	2012/04/03	Change tolerance	Carl Hu
△	2008/08/20	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI(HPCN) 36pin male IDC assembly connector			PART NO.	B03-036111E0-X0		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2008/08/20	Yugong	Carl Hu		B03-061
东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			