


No. of Pin	Dimension					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
50	52.37	46.5	35.39	40.00	46.50	30.48
68	64.00	57.92	46.90	51.80	57.92	41.91
100	84.18	78.23	67.14	71.85	78.23	62.23

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part No.:


B03-XXX818XB-01
No.of contact: _____
14=14pos
?
100=100POS
Contact area: _____
A: G/F
C: Au 3u”
H: Au 15u”

3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: see note Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks




male vertical for PCB			PART NO.		B03-XXX818XB-01	
UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
DATE:	2010/09/18	Huangmei	Jack Chen		B03-008	
东莞市林诚塑胶电子有限公司				http://www.lineconn.com		
				TEL:0769-85181660 85181770		

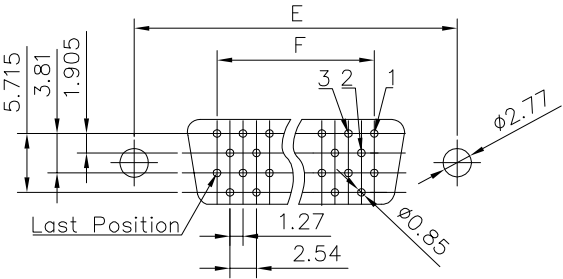

PCB Layout
(14,26,50 Pos)

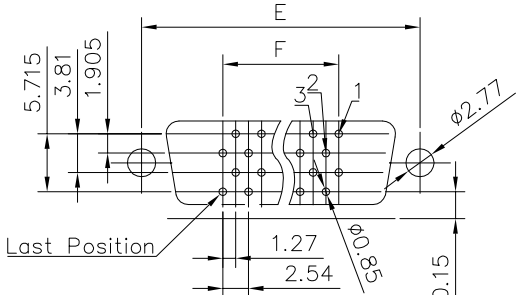

PCB Layout
(20,36,40,68,100 Pos)

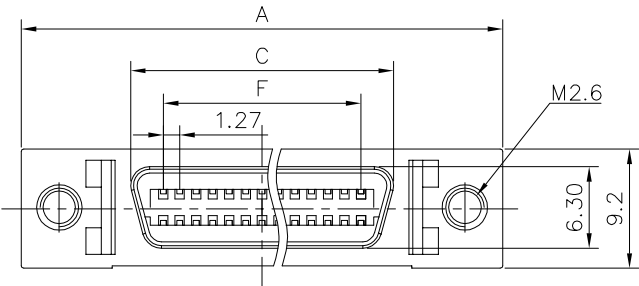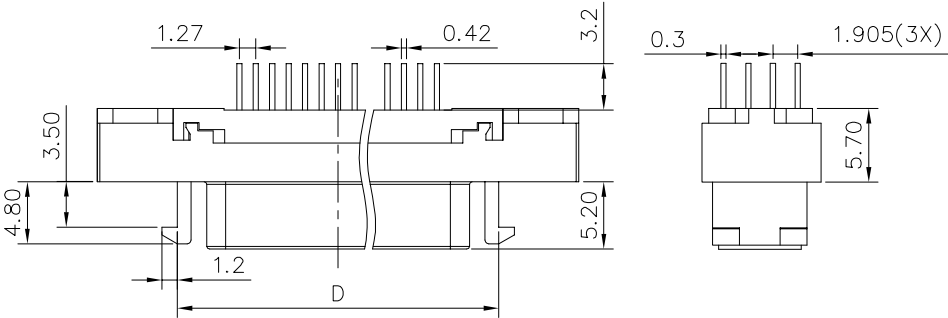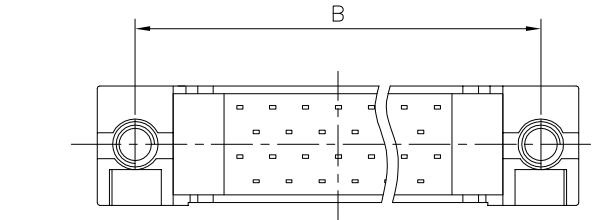

△	2025/08/12	Delete 40pin model	Jack Chen
△	2025/04/27	Change tolerance	Jack Chen
△	2010/09/18	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		SCSI female vertical for PCB				PART NO.		B03-XXX818XB-01	
REV:	G	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2010/09/18	Huangmei	Jack Chen		B03-008		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com				
					TEL:0769-85181660 85181770				

lineconn 东莞市林诚塑胶电子有限公司