
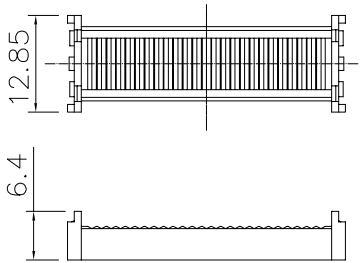





Pin No.	A	B	C	E	F
09	30.81	24.99	16.92	11.08	10.16
15	39.20	33.30	25.25	19.39	17.78
25	53.05	47.04	38.96	33.24	30.48
37	69.40	63.50	55.42	49.86	45.72

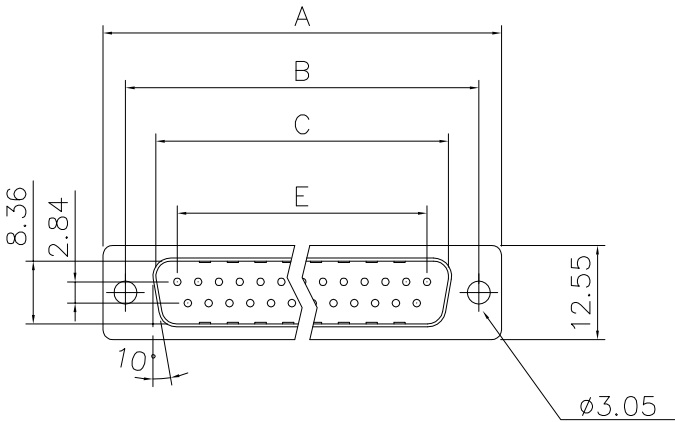

Cover

Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX1X1A0-03
No.of contact: _____
09: 9pin
15: 15pin
25: 25pin
37: 37pin
Housing color: _____
1: Black
5: White
6: Blue

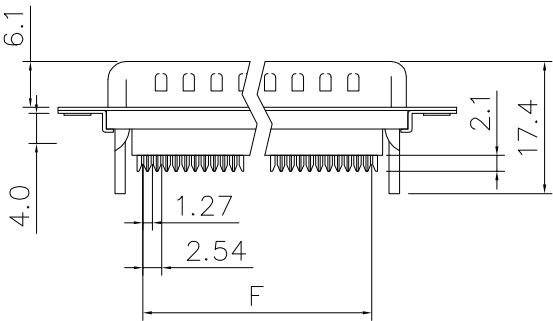


Strain Relief

6	Iron sheet	SPCC	Plating: Ni
5	Strain relief	PBT UL94V-0	Color: see part no.
4	Cover	PBT UL94V-0	Color: see part no.
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: see part no.
1	Terminal	Copper alloy	Plating: gold flash and Ni
Item	Desc.	Material	Remark

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

D-SUB male IDC for flat cable, short ear housing, three piece

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2021/12/04

Huangmei

Jack Chen

B05-214

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL: 0769-85181660 85181770

△

SIDE

8

7

6

5

4

3

2

1