


Current rating: 5A
 Withstanding voltage: 250V AC
 Contact resistance : 30mΩ max.
 Insulation resistance: 1000MΩ Min.
 Temperature range: -55℃ to +105℃
 ROHS compliant
 Part number:

B17-0366X1A0-02

Housing color:

- 1: Black
- 6: Blue

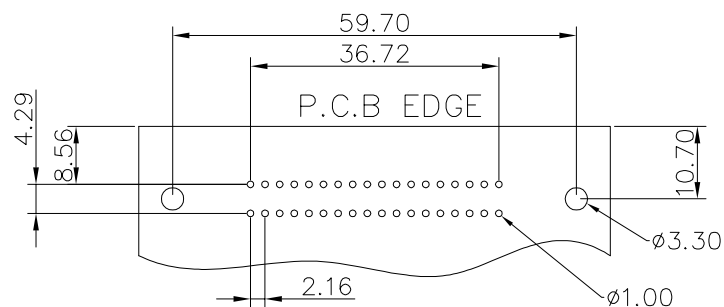

PCB layout


6	Spring loaded buckle	Steel	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Board lock	SPCC	Plating: Sn
3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

QUALITY SYMBOLS

- : ☒: CRITICAL MAJOR
- ▽: ▽: ZERO DEFECT S.P.C

Tolerance

- .x ±0.60
- .x ±0.40
- .xx ±0.25



NAME:	Centronics(57) 36pin female right angle for PCB				PART NO.	B17-0366X1A0-02		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/09/07	Huangmei	Carl Hu		B17-042	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL:0769-85181660 85181770

△	2022/09/07	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

A

A