
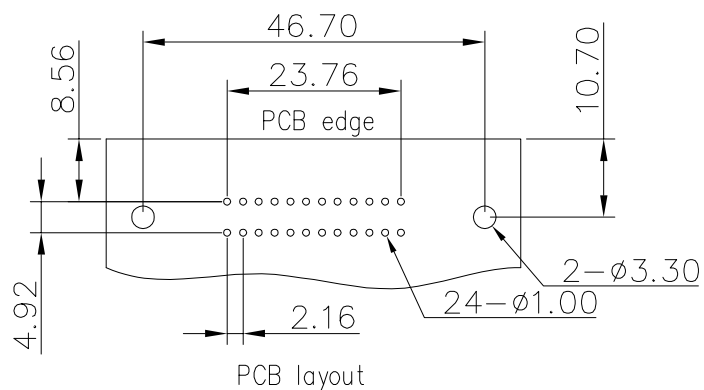
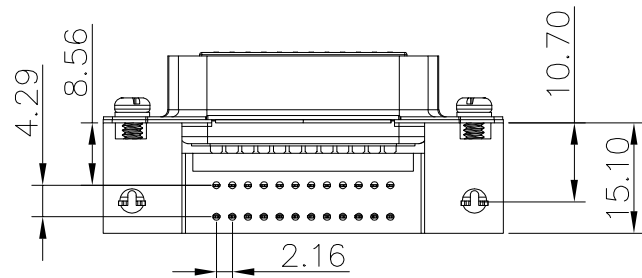
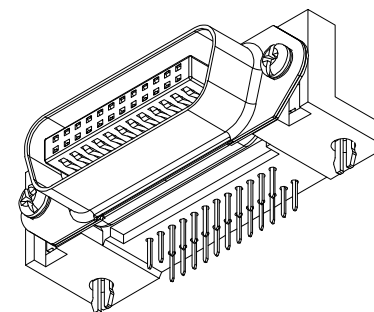



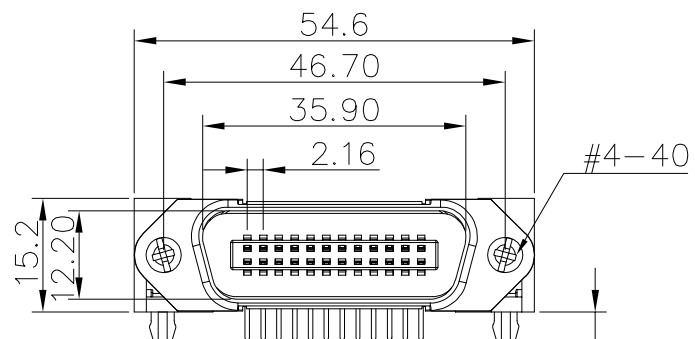

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0245X1A0-02

Housing color: _____
1: Black
6: Blue

6	Spring loaded buckle	Steel	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Board lock	SPCC	Plating: Sn
3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/10/11	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5


QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR

▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	Centronics(57) 24pin male right angle for PCB				PART NO.	B17-0245X1A0-02		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2021/10/11	Huangmei	Carl Hu		B17-028	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770