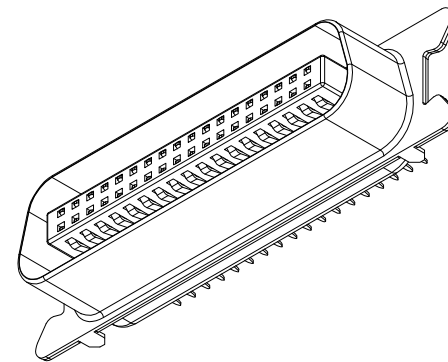

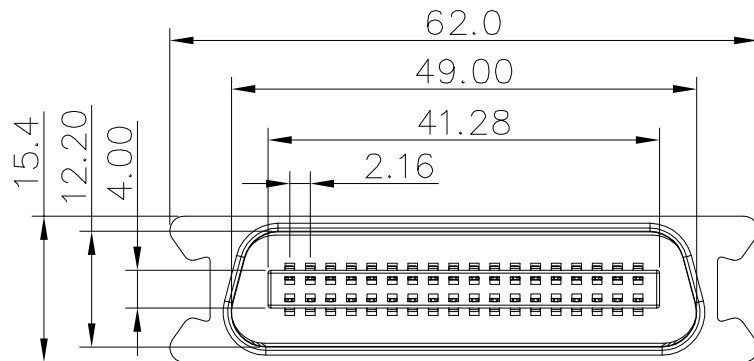


PCB layout

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0367X1A0-M2

Housing color: _____
1: Black
6: Blue

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/09/05	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽ :	▽ :	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:	Centronics(57) 36pin male vertical for PCB,MD type			PART NO.	B17-0367X1A0-M2		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/09/05	Huangmei	Jack Chen		B17-041
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			