

10A,20A,30A

40A

Current rating:10/20/30/40 AMP.
 Contact resistance:2.7 milliohms max.
 Withstanding voltage:1000V AC
 Insulation resistance:5000MΩ Min.
 Temperature range:-55°C to +125°C
 ROHS compliant
 Part number:





B08-8W84X1X0-X2
 Housing color: _____
 1: Black
 3: Green
 5: White
 Terminal plated: _____
 4: Au 2u"
 5: Au 1u"
 Current rating: _____
 A:10A,Dim.A ϕ 1.7 Dim.B 5.5mm
 B:20A,Dim.A ϕ 2.8 Dim.B 5.5mm
 C:30A,Dim.A ϕ 3.2 Dim.B 5.5mm
 D:40A,Dim.A ϕ 4.6 Dim.B 6.0mm

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal plating: see part No.
Item	Desc.	Material	Remark

△	2025/05/09	Added 40A separate icon,Change tolerance	Carl Hu
△	2023/04/24	Add housing color	Qiang Liao
△	2022/11/04	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x:	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	8W8 female solder,cup 5.5mm				PART NO.	B08-8W84X1X0-X2		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/11/04	Yugong	Carl Hu		B08-027	
				东莞市林诚塑胶电子有限公司		http://www.lineconn.com TEL:0769-85181660 85181770		
8	7	6	5	4	3	2	1	

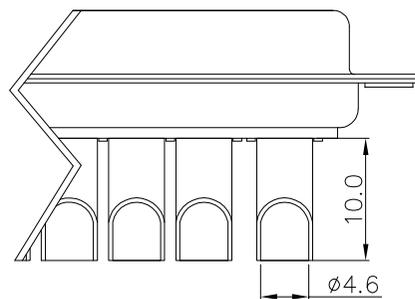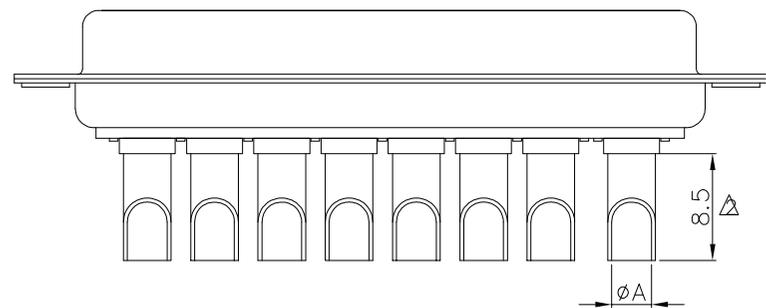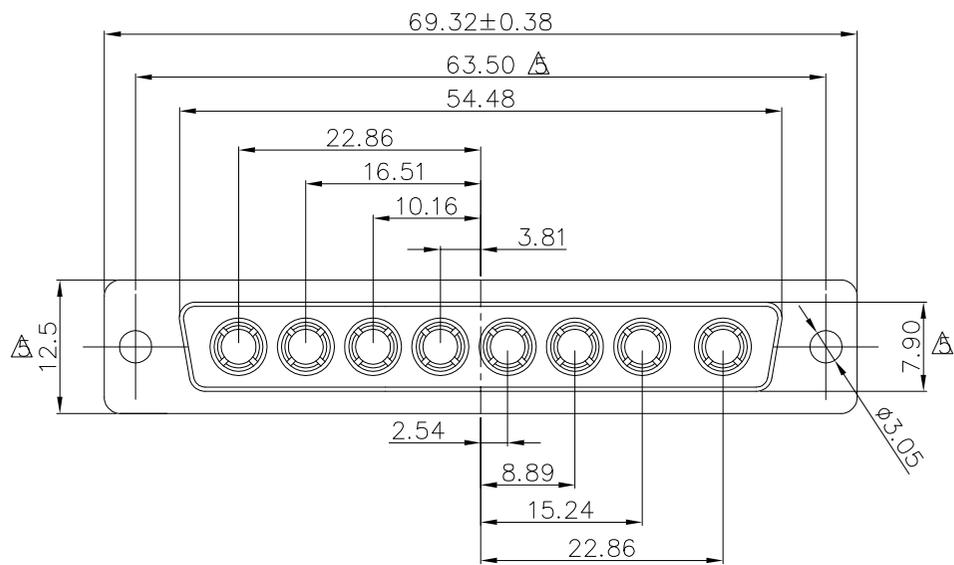

10A,20A,30A

40A

Current rating: 10/20/30/40 AMP.
 Contact resistance: 2.7 milliohms max.
 Withstanding voltage: 1000V AC
 Insulation resistance: 5000MΩ Min.
 Temperature range: -55°C to +125°C
 ROHS compliant
 Part number:

B08-8W84X1X0-X1

- △ Housing color: _____
- 1: Black
- 3: Green
- 5: White
- △ Terminal plated: _____
- 4: Au 2u"
- 5: Au 1u"
- Current rating: _____
- A: 10A, Dim.A ϕ 1.7
- B: 20A, Dim.A ϕ 2.8
- C: 30A, Dim.A ϕ 3.2
- D: 40A, Dim.A ϕ 4.6

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal plating: see part No.
Item	Desc.	Material	Remark

△	2025/05/09	Added 40A separate icon, Change tolerance	Carl Hu
△	2024/04/24	Add housing color	Qiang Liao
△	2015/01/06	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	8W8 female solder, cup 8.5mm				PART NO.	B08-8W84X1X0-X1		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/01/06	Yugong	Carl Hu		B08-020	
				东莞市林诚塑胶电子有限公司		http://www.lineconn.com TEL: 0769-85181660 85181770		

A

A