
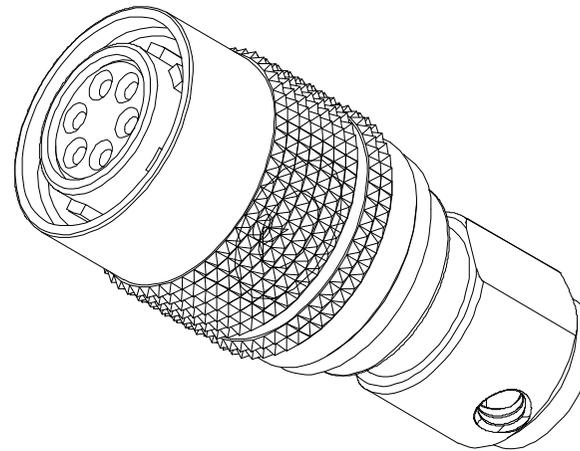
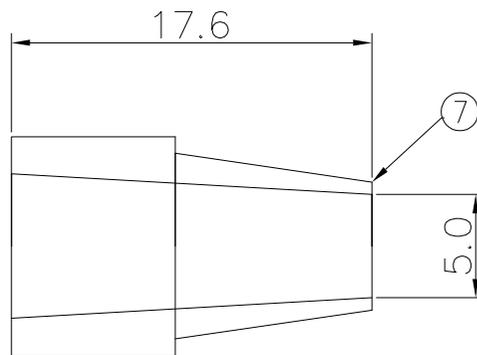


Current rating: 2A
 Rated voltage: 100V
 Contact resistance: 10mΩ Max.
 Durability: 500 cycles
 Temperature range: -25°C to +85°C
 ROHS compliant
 Waterproof rating: IP67



7	Jacket	Rubber	Color: black
6	Tail cover	Copper	Plating: Ni
5	Terminal	Copper	Plating: Au
4	Spring	Spring steel	
3	Shell	Copper	Plating: Ni
2	Housing	PPS	Color: black
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△			
△	2021/09/14	Add jacket drawings	Carl Hu
△	2018/03/11	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	HR10A-7P-6S 6pin female solder assembly, plastic jacket				PART NO.	B10-01PT06SH-KFD		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/03/11	Yugong	Carl Hu		B10-032	
东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL: 0769-85181660 85181770			
8	7	6	5	4	3	2	1	