


10A,20A,30A

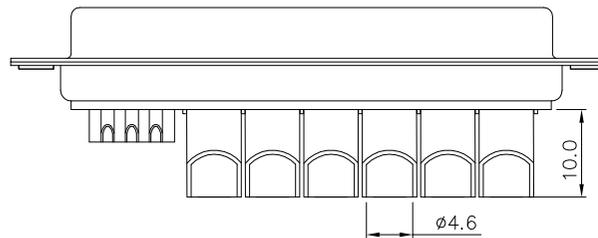

40A

Current rating:10/20/30/40 AMP.  
 Contact resistance:2.7 milliohms max.  
 Withstanding voltage:1000V AC  
 Insulation resistance:5000M $\Omega$  Min.  
 Temperature range:-55 $^{\circ}$ C to +125 $^{\circ}$ C  
 ROHS compliant  
 Part number:

B08-AW64X1X0-X1

Housing color:

1: Black

3: Green

5: White

Terminal plated:

4: Au 2 $\mu$ "

5: Au 1 $\mu$ "

Current rating:

A:10A,Dim.A  $\phi 1.7$

B:20A,Dim.A  $\phi 2.8$

C:30A,Dim.A  $\phi 3.2$

D:40A,Dim.A  $\phi 4.6$

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal plating: see part number
Item	Desc.	Material	Remark

QUALITY SYMBOLS

□:      ☒:

CRITICAL      MAJOR

▽:      ▽:


ZERO DEFECT      S.P.C

Tolerance

.x       $\pm 0.60$

.x       $\pm 0.40$

.xx       $\pm 0.25$



NAME: 13W6 female solder,cup 8.5mm

REV: A      UNIT: mm      DRW BY

SCALE: N:1      DATE: 2021/09/27      Yugong

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

△	2021/09/27	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

PART NO.		B08-AW64X1X0-X1	
CHK BY	APP BY	DRAWING NO.	
Carl Hu		B08-226	