



Current rating: 10/20/30/40 AMP.
 Contact resistance: 2.7 milliohms max.
 Withstanding voltage: 1000V AC
 Insulation resistance: 5000MΩ Min.
 Temperature range: -55°C to +125°C
 ROHS compliant
 Part number:

B08-BW33X1X0-X1

Housing color: _____
 1: Black
 3: Green
 5: White
 Terminal plated: _____
 4: Au 2u"
 5: Au 1u"
 Current rating: _____
 A: 10A, Dim.A φ1.7
 B: 20A, Dim.A φ2.8
 C: 30A, Dim.A φ3.2
 D: 40A, Dim.A φ4.6

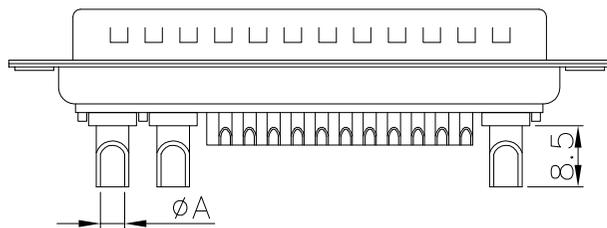

10A, 20A, 30A

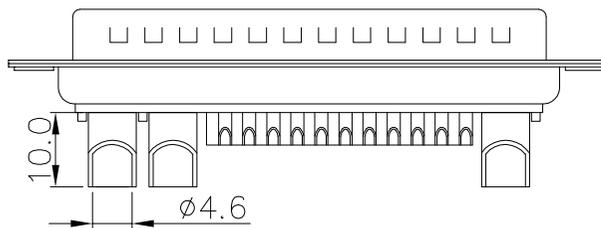

40A

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal plating: see part number
Item	Desc.	Material	Remark

△	2024/12/29	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	25W3 male solder, cup 8.5mm			PART NO.	B08-BW33X1X0-X1		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/12/29	Yugong	Carl Hu		B08-156

Lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770