



Current rating: 10/20/30/40 AMP.
 Contact resistance: 2.7 milliohms max.
 Withstanding voltage: 1000V AC
 Insulation resistance: 5000MΩ Min.
 Temperature range: -55°C to +125°C
 ROHS compliant
 Part number:

B08-BW34X1X0-X1

Housing color:
 1: Black
 3: Green
 5: White
 Terminal plated:
 4: Au 2u"
 5: Au 1u"
 Current rating:
 A: 10A, Dim.A φ1.7
 B: 20A, Dim.A φ2.8
 C: 30A, Dim.A φ3.2
 D: 40A, Dim.A φ4.6

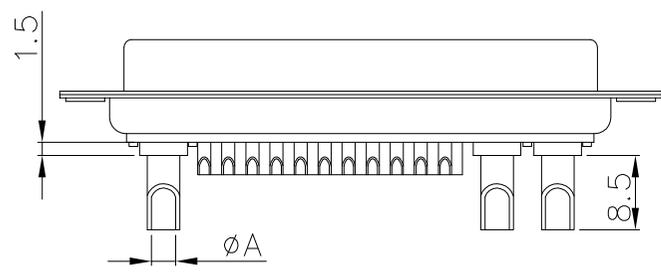

10A, 20A, 30A

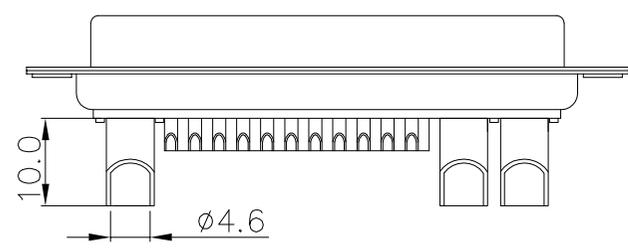

40A

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal plating: see part number
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	25W3 female solder, cup 8.5mm			PART NO.	B08-BW34X1X0-X1		
				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2024/12/29	Yugong	Carl Hu		B08-157
				∇: ∇:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C		东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770							
8	7	6	5	4	3	2	1						