
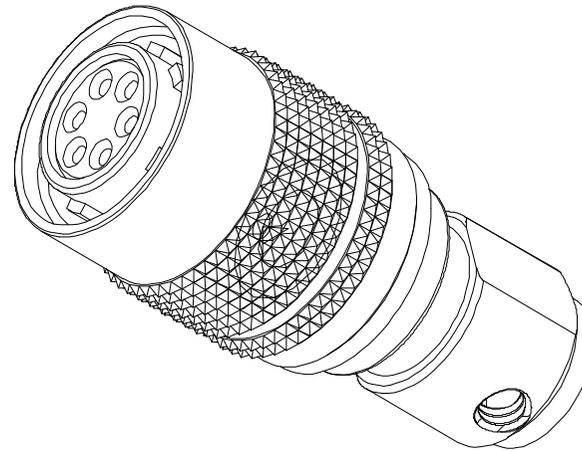


Current rating: 2A
 Rated voltage: 100V
 Contact resistance: 10mΩ Max.
 Durability: 500 cycles
 Temperature range: -25°C to +85°C
 ROHS compliant
 Waterproof rating: IP67

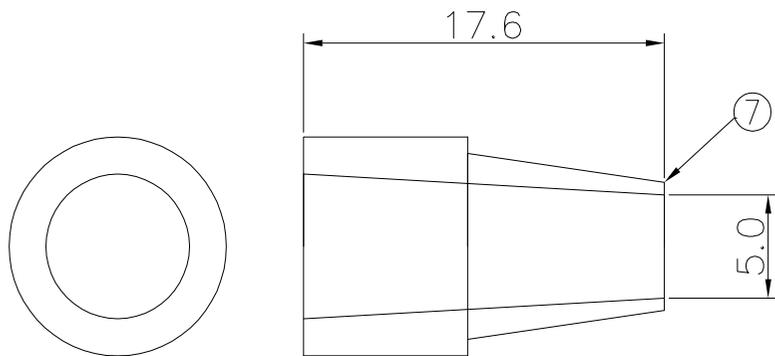

Item	Desc.	Material	Remark
7	Jacket	Rubber	Color: black
6	Tail cover	Copper	Plating: Ni
5	Terminal	Copper	Plating: Au
4	Spring	Spring steel	
3	Shell	Copper	Plating: Ni
2	Housing	PPS	Color: black
1	Hood	Zinc alloy	Plating: Ni

A	SIDE	DATE	DESCRIPTION	APPROVER	QUALITY SYMBOLS	Tolerance	NAME: HR10A-7P-6S 6pin female solder assembly, plastic jacket				PART NO. B10-01PT06SH-KFD	
							REV: B	UNIT: mm	DRW BY: Yugong	CHK BY: Carl Hu	APP BY:	DRAWING NO. B10-032
		2021/09/14	Add jacket drawings	Carl Hu	□: CRITICAL	x. ±0.60	SCALE: N:1	DATE: 2018/03/11	Yugong	Carl Hu		
		2018/03/11	First edition release	Jack Chen	☒: MAJOR	.x ±0.40						
					▽: ZERO DEFECT	.xx ±0.25						
					▽: S.P.C							

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL: 0769-85181660 85181770