

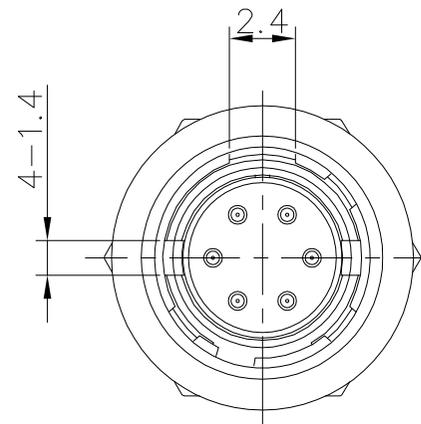



Soldering face

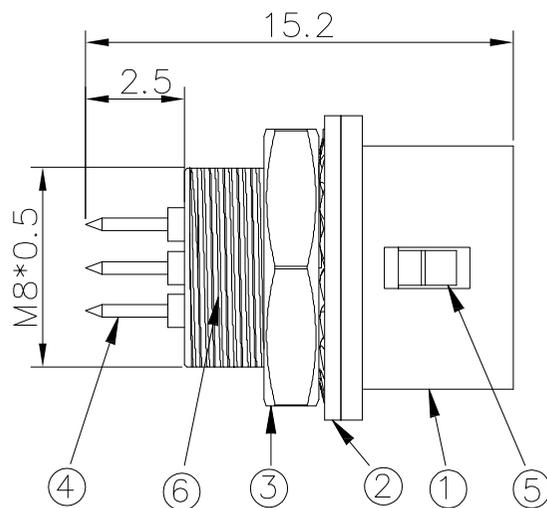


Mating face

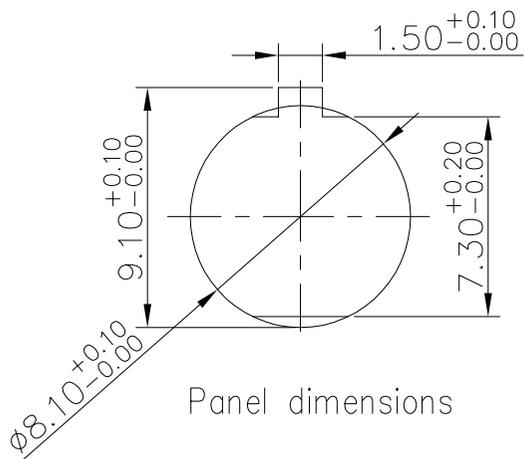

Panel dimensions

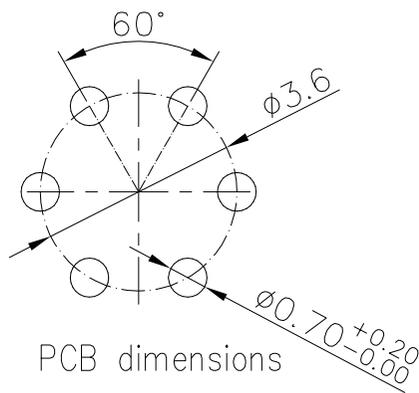

PCB dimensions



Current rating: 2A  
 Rated voltage: 100V  
 Contact resistance: 10mΩ Max.  
 Durability: 1000 cycles  
 Temperature range: -25°C to +85°C  
 ROHS compliant  
 Waterproof rating: IP67

6	Housing	PPS	Color: black
5	Spring	QBe1.9	
4	Terminal	Copper alloy	Plating: Au
3	Nut	Copper alloy	Plating: Ni
2	Gaskets	Stainless steel	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△	2018/05/26	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	HR10A-7R-6PB male vertical for PCB rear lock panel			PART NO.	B10-01PZ06SP-ZGD		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/05/26	Yugong	Carl Hu		B10-035
东莞市林诚塑胶电子有限公司				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770			
3	2	1					