
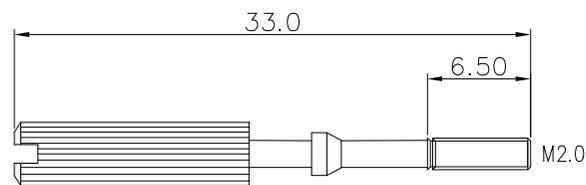


Section: A-A

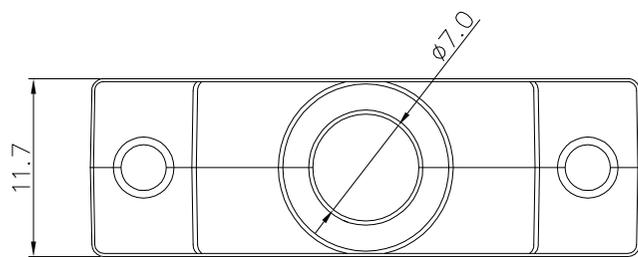

Current rating: 1A  
 Insulation resistance: 500mohm min.  
 Withstanding voltage: 250V AC  
 Insulation resistance: 500MΩ Min.  
 Temperature range: -45°C to +105°C  
 ROHS compliant


Item	Desc.	Material	Remark
6	Screw	Steel	Plating: Ni
5	Hood	Zinc alloy	Plating: Ni
4	Housing	LCP UL94V-0	Color: black
3	Cover	LCP UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn

QUALITY SYMBOLS

□:      ☒:  
 CRITICAL MAJOR  
 ▽:      ▽:  
 ZERO DEFECTS.P.C

Tolerance

.x      ±0.60  
 .x      ±0.40  
 .xx     ±0.25



NAME:

DH40-37S 37pin male solder assembly, zinc alloy hood with screw

REV:

A      UNIT: mm      DRW BY

SCALE:

N:1      DATE: 2021/12/27      Huangmei

PART NO.

B01-0DH4037S-A1

CHK BY

APP BY

Carl Hu

B01-079

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
 TEL: 0769-85181660 85181770

△

SIDE

2021/12/27





DATE

First edition release

DESCRIPTION

Carl Hu

APPROVER

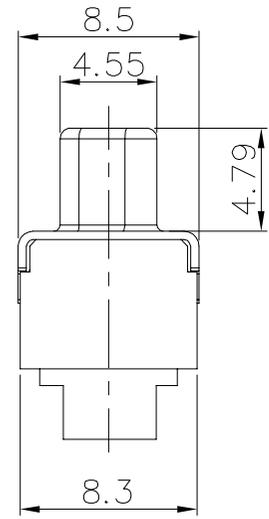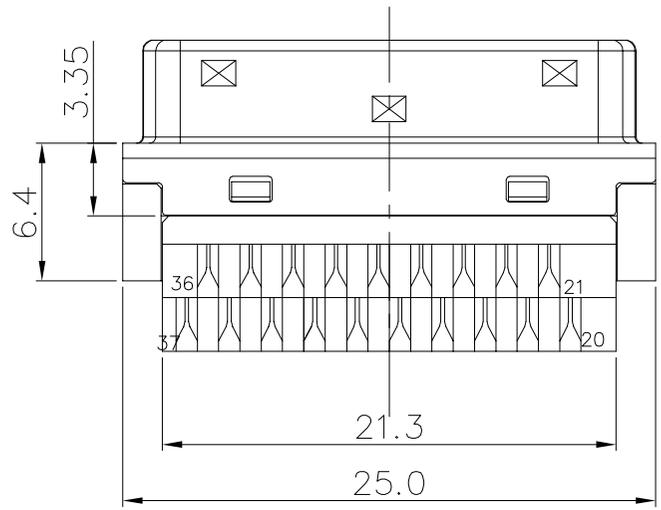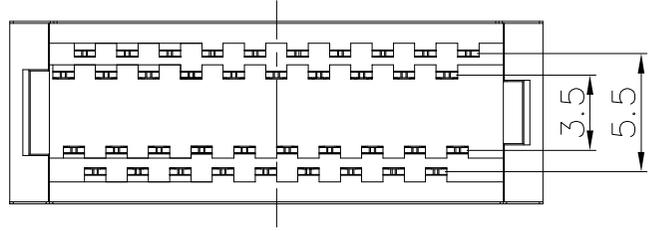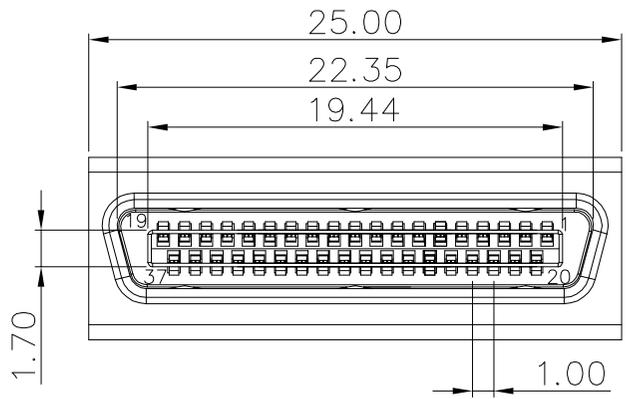

Current rating: 1A  
 Insulation resistance: 500mohm min.  
 Withstanding voltage: 250V AC  
 Insulation resistance: 500MΩ Min.  
 Temperature range: -45℃ to +105℃  
 ROHS compliant

4	Housing	LCP UL94V-0	Color: black
3	Cover	LCP UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	C5191	Contact area: Au 5u" Solder area: Sn
Item	Desc.	Material	Remark

△			
△			
△	2021/12/27	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	DH40-37S 37pin male solder conn.			PART NO.	B01-0DH4037S-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2021/12/27	Huangmei	Carl Hu		B01-080
				<b>东莞市林诚塑胶电子有限公司</b>			
				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL: 0769-85181660 85181770			
8	7	6	5	4	3	2	1