
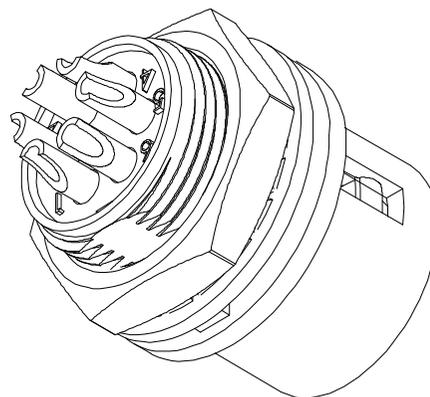


Current rating: 2A
 Rated voltage: 100V
 Contact resistance: 10mΩ Max.
 Durability: 1000 cycles
 Temperature range: -25°C to +85°C
 ROHS compliant
 Waterproof rating: IP67

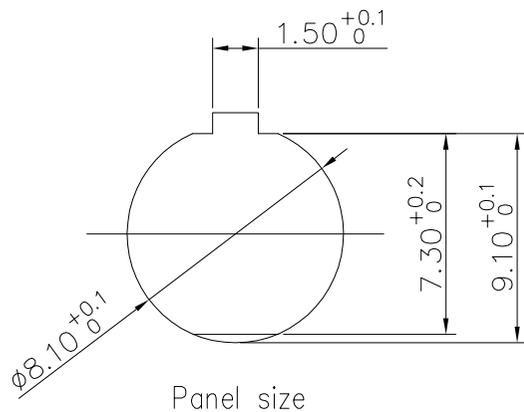

6	Housing	PPS	Color: black
5	Spring	QBe1.9	
4	Terminal	Copper alloy	Plating: Au
3	Nut	Copper alloy	Plating: Ni
2	Gaskets	Stainless steel	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	HR10A-7R-6S female solder rear lock panel			PART NO.	B10-01PZ06SH-KGD		
△	2023/09/24	Change tolerance	Carl Hu	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2017/09/19	First edition release	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2017/09/19	Yugong	Carl Hu		B10-006
				▽: ▽:	.xx ±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									
8	7	6	5	4	3	2	1						