

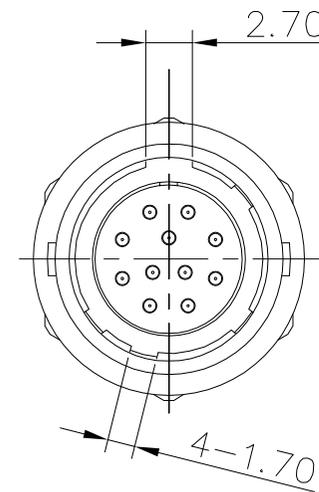


Soldering face

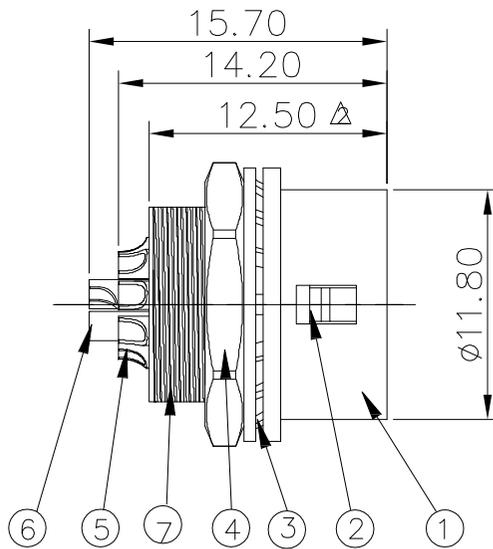


Mating face

Current rating: 2A
 Rated voltage: 100V
 Contact resistance: 10mΩ Max.
 Durability: 1000 cycles
 Temperature range: -25°C to +85°C
 ROHS compliant
 Waterproof rating: IP67

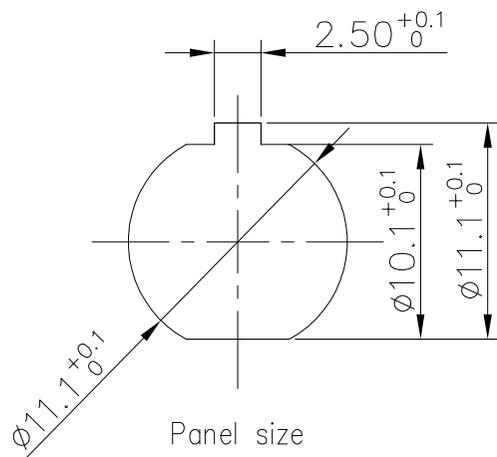

Panel size



7	Housing	PPS	Color: black
6	Terminal	Copper	Plating: Au
5	Terminal	Copper	Plating: Au
4	Nut	Copper	Plating: Ni
3	Gaskets	Stainless steel	Plating: Ni
2	Spring	QBe1.9	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

QUALITY SYMBOLS				Tolerance		NAME: HR10A-10R-12P male solder rear lock panel				PART NO. B10-02PZ12SH-ZGD			
△	2026/03/04	Add the size	Carl Hu	□	×	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
▲	2023/06/24	First edition release	Carl Hu	CRITICAL	MAJOR	SCALE:	N:1	DATE:	2023/06/24	Yugong	Carl Hu		B10-172
SIDE	DATE	DESCRIPTION	APPROVER	▽	▽	lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
8	7	6	5	ZERO DEFECT	S.P.C	TEL:0769-85181660 85181770				1			