





No. of Contact	A	B	C±0.38	D Δ	E Δ
09	16.30	25.00	30.80	37.1	39.6
15	24.80	33.30	39.20	45.5	48.0
25	38.30	47.04	53.04	59.4	61.9
37	54.80	63.50	69.40	75.5	78.0

Current rating: 5A
 Withstanding voltage: 1000V AC
 Insulation resistance: 1000M Ω Min.
 Contact resistance : 30 milliohms Max.
 Temperature range: -55°C to +105°C
 ROHS compliant

Part number:
 BA5-0XX8115D-02


No. of contact: _____
 09: 9pos
 15: 15pos
 25: 25pos
 37: 37pos

7	Glue	Glue	
6	Waterproof ring	Rubber	
5	Board lock	Copper alloy	Plating: Sn
4	Housing	PBT+30%GF	Color: black
3	Rear shell	Steel	Plating: Sn
2	Front shell	Steel	Plating: Ni
1	Contact	Copper alloy	Plating: full Au 1u"
Item	Desc.	Material	Remark

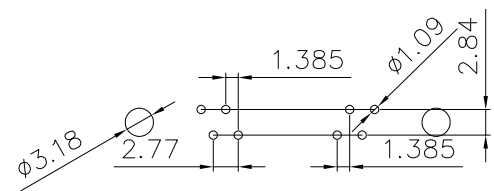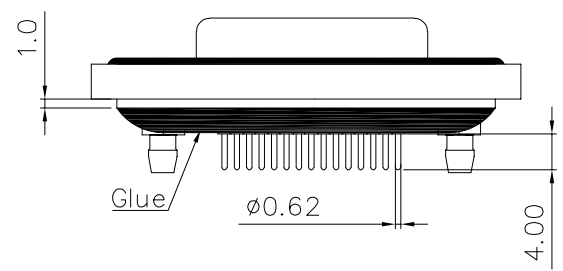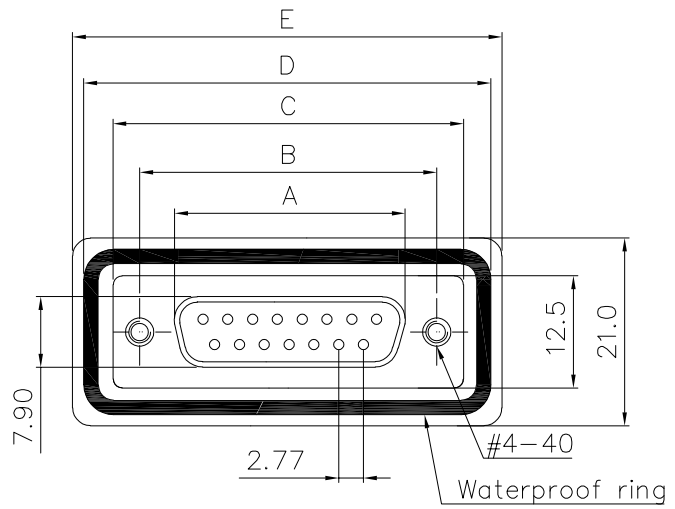

PCB layout

Δ				QUALITY SYMBOLS	Tolerance	NAME:	Waterproof D-SUB machined pin female vertical			PART NO.	BA5-0XX8115D-02		
Δ	2025/11/15	Change size	Jack Chen	\square : \boxtimes :	x. ± 0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
Δ	2025/08/14	First edition release	Jack Chen	CRITICAL MAJOR	.x ± 0.40	SCALE:	N:1	DATE:	2025/08/14	Huangmei	Jack Chen		BA5-029
	SIDE	DATE	DESCRIPTION	APPROVER	∇ : ZERO DEFECT	∇ : S.P.C							


东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL: 0769-85181660 85181770