


- Notes:
- 1.Electrical test:100% open,short&miss wire test.
  - 2.Conductor resistance:5Ω max.
  - 3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
  - 4.ROHS compliant
  - 5.Part number description:A05-02511XXX-01, XXX:001=length:10cm

Pin assignment

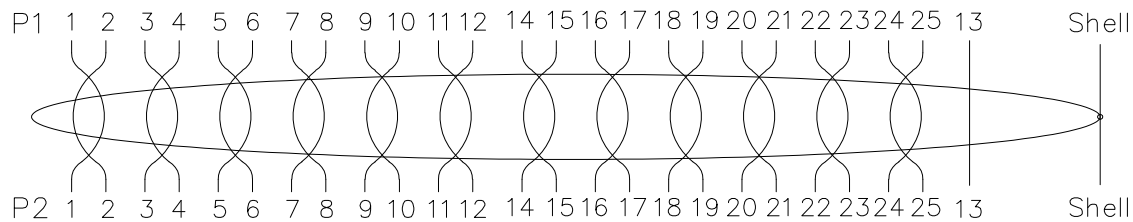

6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.8mm	1pcs
5	Copper foil	Copper foil w=25mm	NA
4	Overmold	45P PVC color:black	NA
3	Mold	PE	NA
2	Screw	Screw 4-40# Ni(big E33BK)	4pcs
1	Connector	DB25pin male solder,color:black	2pcs
Item	Part name	Description	QY'T

				QUALITY SYMBOLS	Tolerance		NAME: D-SUB 25Pin male to male cable,molder type				PART NO.	A05-02511XXX-01			
A	SIDE	DATE	DESCRIPTION	APPROVER	<input type="checkbox"/> : <input checked="" type="checkbox"/> : CRITICAL MAJOR <input checked="" type="checkbox"/> : <input checked="" type="checkbox"/> : ZERO DEFECT S.P.C	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
						300~2000	±50	SCALE:	NONE	DATE:	2018/05/24	Yugong	Carl Hu		A05-012
						2001~5000	±100	东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770							
8	7	6	5	4	3	2	1								