
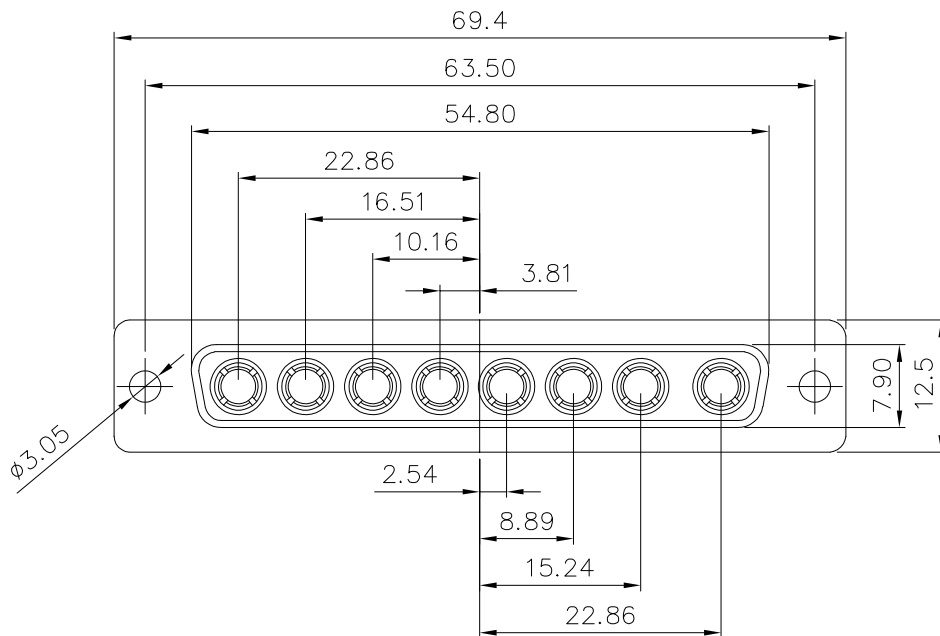


High frequency contact characteristic
impedance: 50Ω
Withstanding voltage: 300V
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +125°C
ROHS compliant

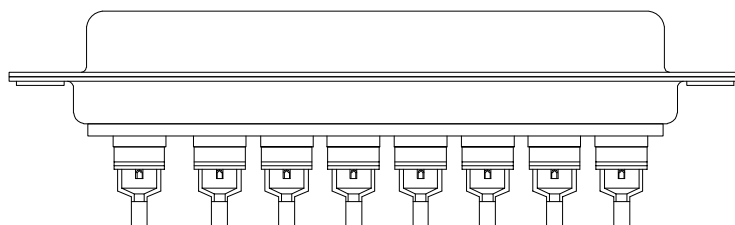

4	Housing	PBT(UL94V-0)	Color: black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: Full Au 2u"
Item	Desc.	Material	Remark

△	2022/03/02	First edition release	2025/06/26
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		8W8 female coaxial connector			PART NO.	B08-AW6H114N-DA	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/02	Huangmei	Carl Hu		B08-147
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		