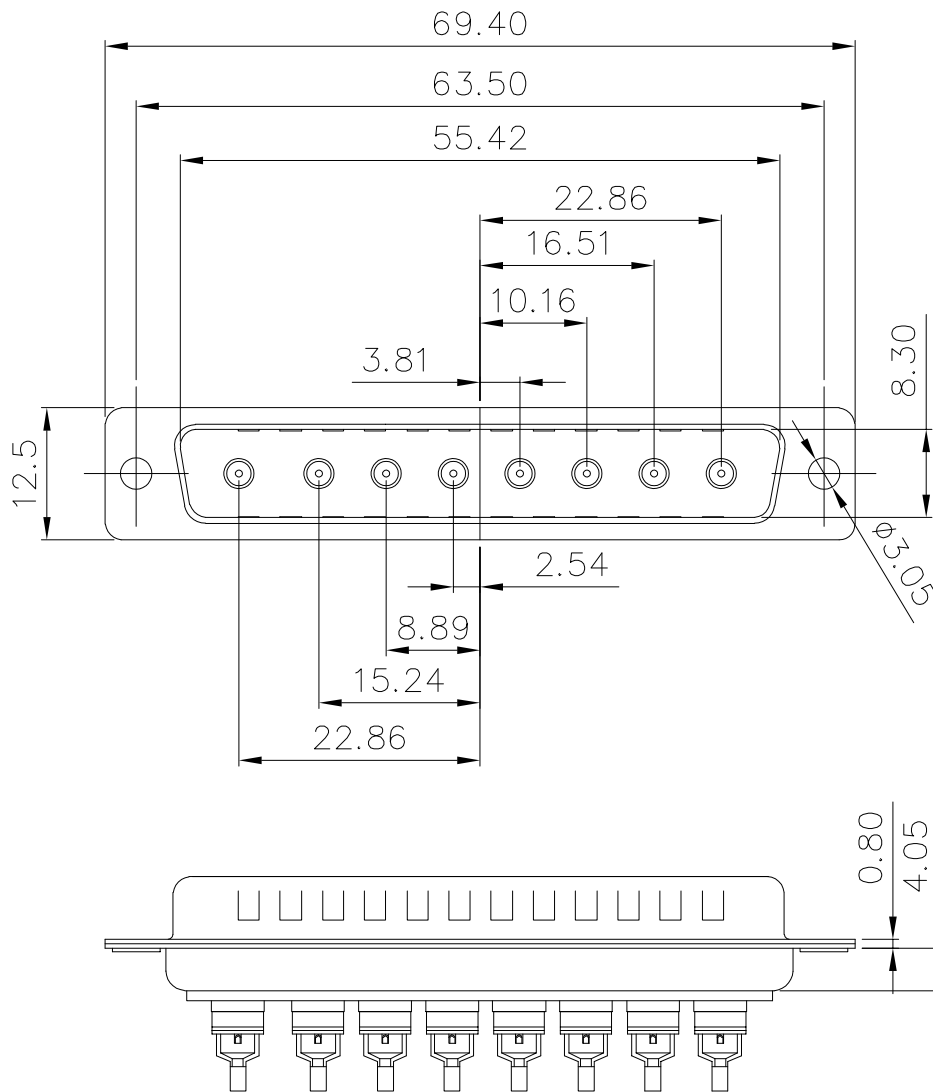


High frequency contact characteristic
impedance: 50Ω
Withstanding voltage: 300V
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +125°C
ROHS compliant

4	Housing	PBT(UL94V-0)	Color: black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: Full Au 2u"
Item	Desc.	Material	Remark

△	2022/03/02	First edition release	2025/06/26
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS
□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:	8W8 male coaxial connector				PART NO.	B08-AW6L114N-DA		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/03/02	Huangmei	Carl Hu		B08-146	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			