
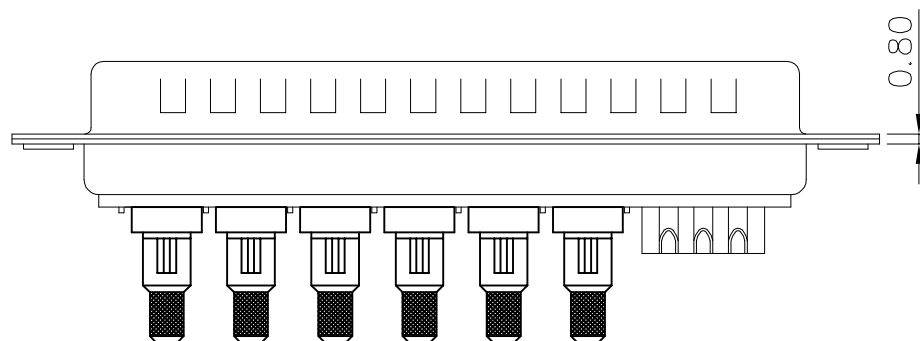




High frequency contact characteristic
impedance: 50Ω
signal contact current rating: 5A
Withstanding voltage: 300V
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

4	Housing	PBT(UL94V-0)	Color:black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: Full Au 2u”
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	13W6 male coaxial connector,solder				PART NO.	B08-AW6K114N-DA	
				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2021/12/04	First edition release		2025/06/26	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2021/12/04	Huangmei	Carl Hu	B08-143
				▽: ▽:	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com						TEL:0769-85181660 85181770	
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C								
8		7		6	5	4		3		2		1	