
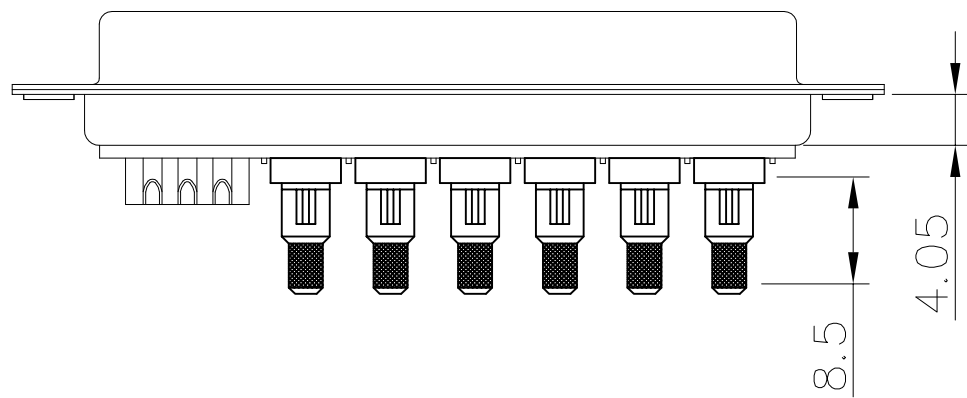
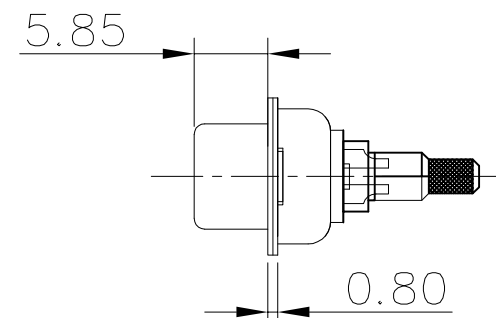


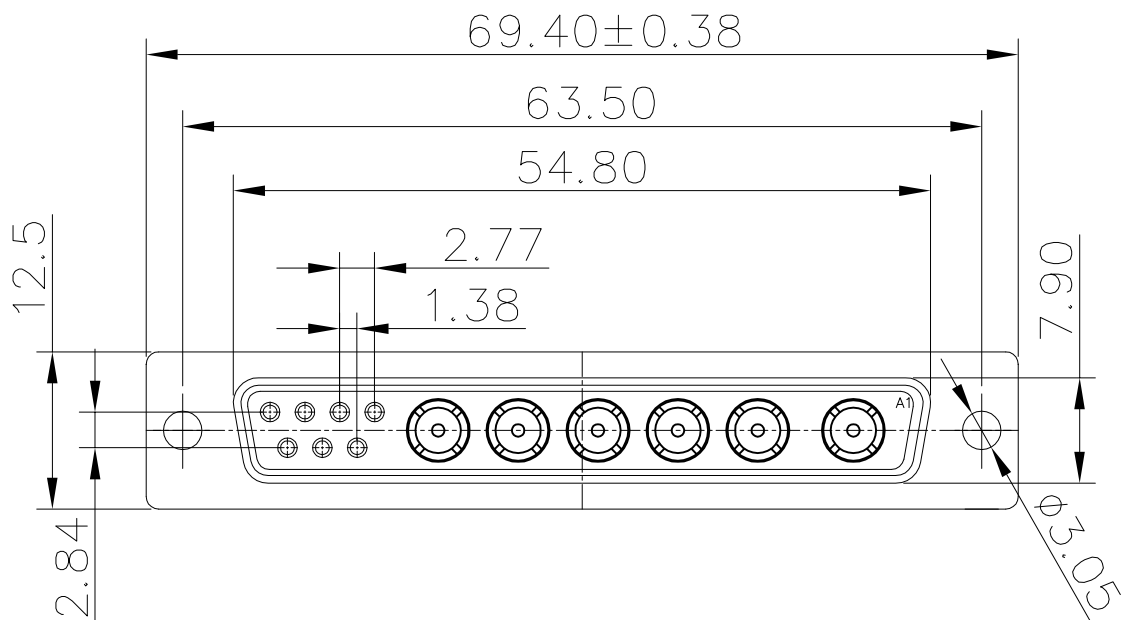

Current rating: 40A
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT(UL94V-0)	Color: black
1	Terminal	Copper alloy	Terminal plated: full Au 2u"
Item	Desc.	Material	Remark

A					QUALITY SYMBOLS	Tolerance		NAME: 13W6 female solder,coaxial terminal		PART NO. B08-AW6H114N-DA	
					□: ☒:	x. ±0.60	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY
		2023/11/16	First edition release	Shuo Cao	CRITICAL MAJOR	.x ±0.40	SCALE: N:1	DATE: 2023/11/16	Huangmei	Shuo Cao	DRAWING NO. B08-116
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx ±0.25					
8		7	6	5	4	3	2	1			