
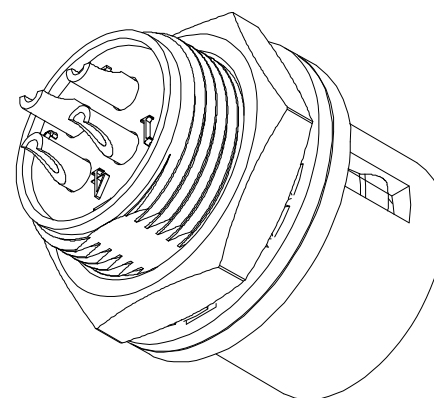


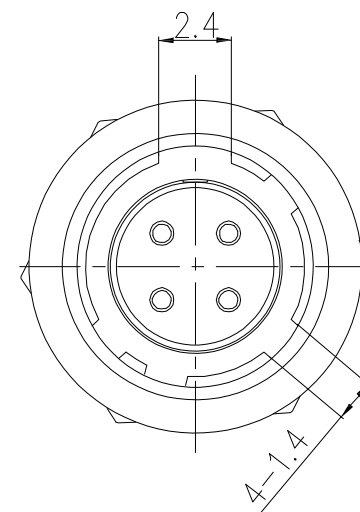

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67

6	Housing	PPS	Color: black
5	Sprung	QBe1.9	
4	Terminal	Copper alloy	Plating: Au
3	Nut	Copper alloy	Plating: Ni
2	Gaskets	stainless steels	
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME: HR10A-7R-4P 4pin male solder, rear lock panel				PART NO.	B10-01PZ04SH-ZGD	
				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2023/01/12	Huangmei	Jack Chen		B10-148
				▽: ▽:	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C								

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770