

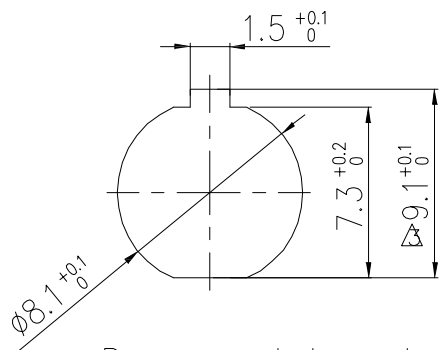
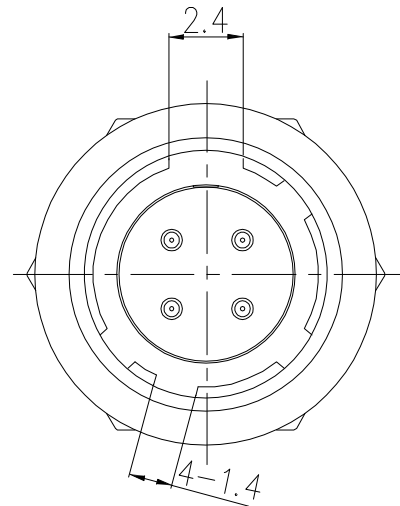
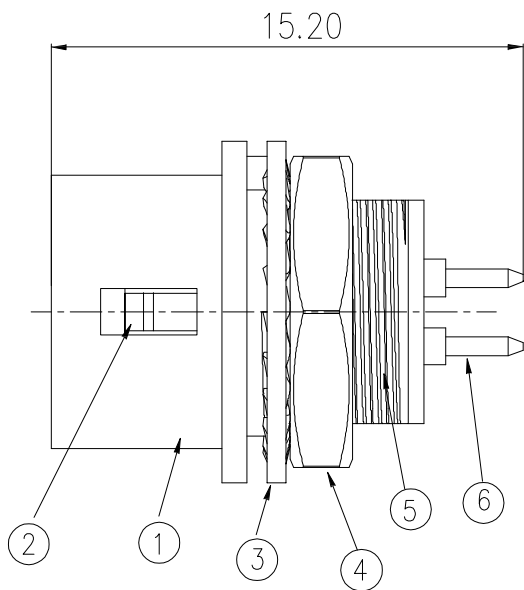


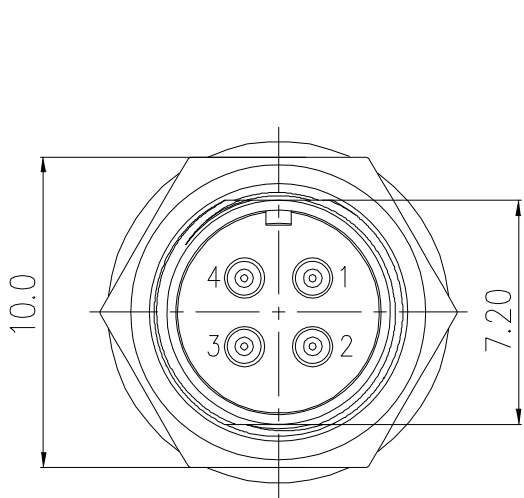


Recommended panel size

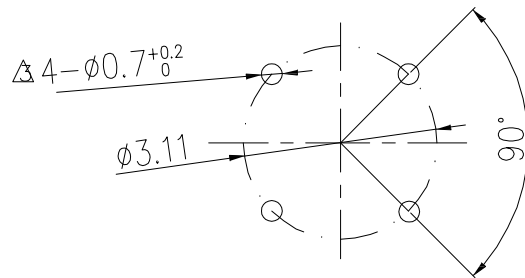

Recommended PCB size

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -45℃ to +85℃
ROHS compliant
Waterproof rating: IP67



6	terminals	Copper alloy	Plating: Au
5	Housing	PPS	Color: black
4	Nut	Copper alloy	Plating: Ni
3	Gaskets	stainless steels	
2	Sprung	QBe1.9	
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

A		2025/01/14	Change error size	Jack Chen	QUALITY SYMBOLS □ : ✖ : CRITICAL MAJOR ZERO DEFECT S.P.C	Tolerance		NAME: HR10A-7R-4PB 4pin male vertical for PCB,rear lock panel				PART NO.		B10-01PZ04SP-ZGD	
		2025/01/09	Change temperature range	Jack Chen		x. ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B10-147	
		2023/01/12	First edition release	Jack Chen		.x ±0.40	SCALE:	N:1	DATE:	2023/01/12	Huangmei	Jack Chen			
						.xx ±0.25	 lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
	SIDE	DATE	DESCRIPTION			APPROVER									
		8	7	6	5	4	3		2		1				