
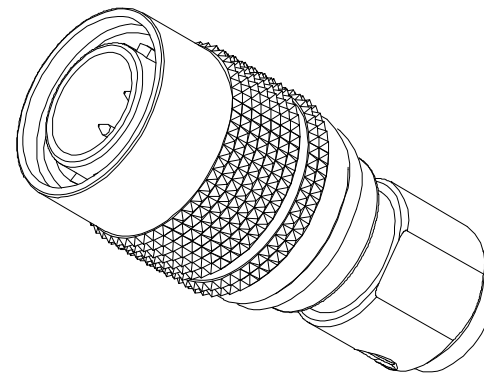
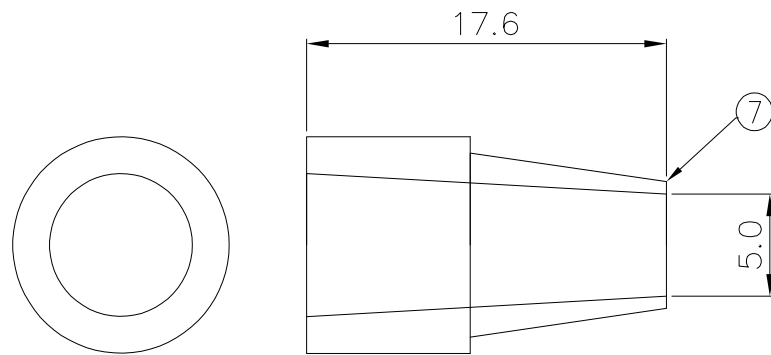

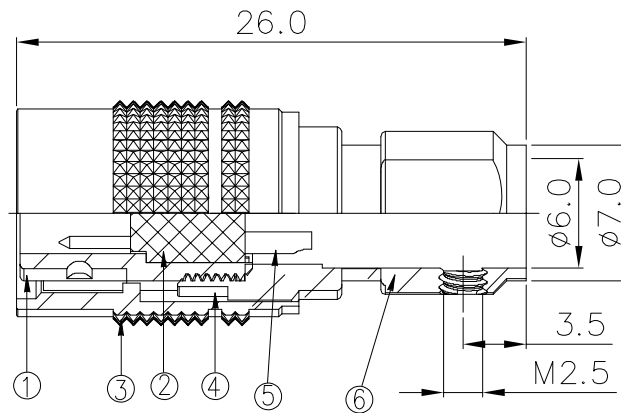


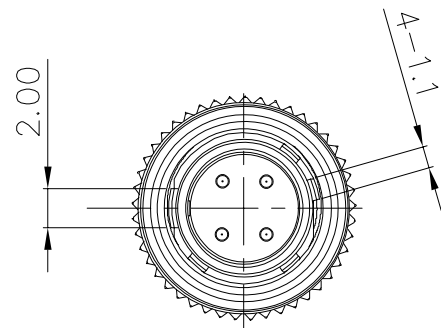

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 500 cycles
Temperature range: -25°C to +85°C
ROHS compliant
Waterproof rating: IP67

7	Jacket	Rubber	Color: black
6	Tail cover	Copper	Plating: Ni
5	Terminal	Copper	Plating: Au
4	Spring	Spring steel	
3	Shell	Copper	Plating: Ni
2	Housing	PPS	Color: black
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△			
△	2021/09/14	Add jacket drawings	Carl Hu
△	2018/05/05	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		HR10A-7P-4P 4pin male solder assembly,plastic jacket			PART NO.		B10-01PT04SH-ZFD	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/05/05	Yugong	Carl Hu		B10-011	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			