

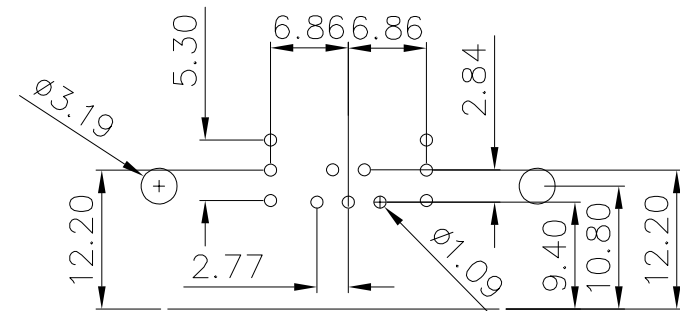
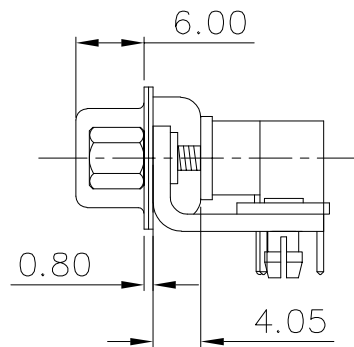


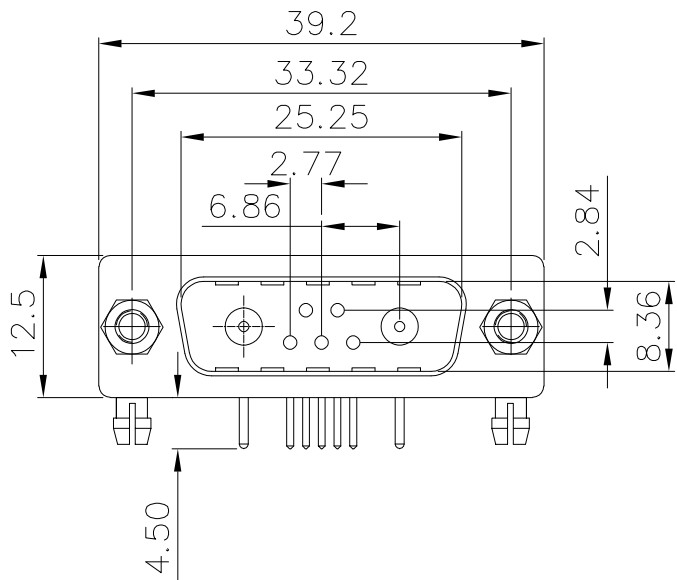

PCB Layout

High frequency contact characteristic
impedance: 50Ω
Withstanding voltage: 300V
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +125°C
ROHS compliant

7	Screw	Steel	Plating: Ni
6	Board lock	Copper alloy	Plating: Sn
5	Bracket	Steel	Plating: Ni
4	Housing	PBT(UL94V-0)	Color: black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: Full Au 1u"
Item	Desc.	Material	Remark

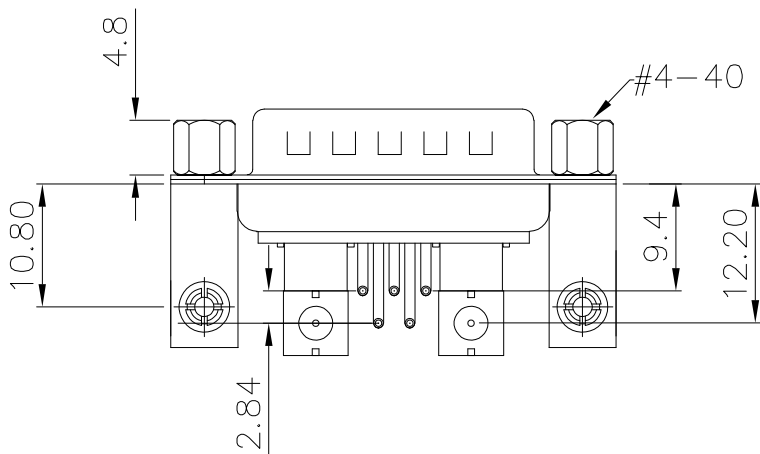

					QUALITY SYMBOLS	Tolerance	NAME:	7W2 male coaxial right angle, riveted 10.80mm insert, lock 4.8mm screw				PART NO.	B08-7W25115D-0S		
	2024/04/13	Change tolerance			Carl Hu	: : x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B08-086	
		2023/10/27	First edition release	Jack Chen	CRITICAL MAJOR .x ±0.40	SCALE:	N:1	DATE:	2023/10/27	Huangmei	Carl Hu				
					: : .xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT S.P.C									
8		7		6		5		4		3		2		1	