

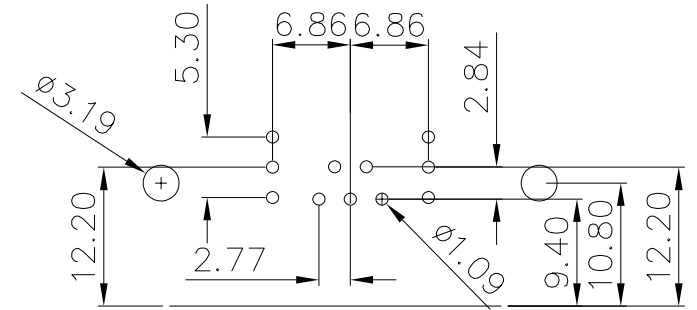
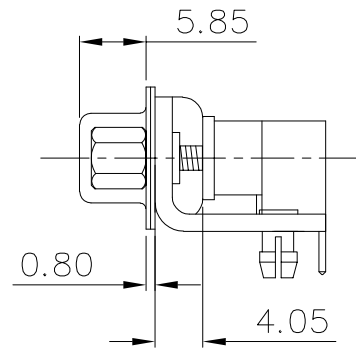


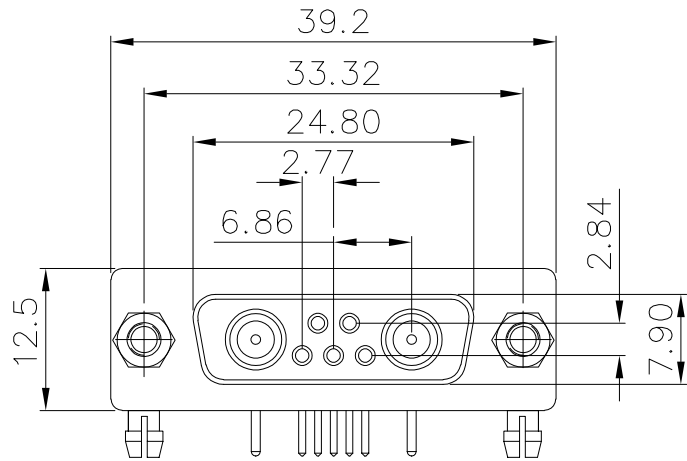

PCB Layout

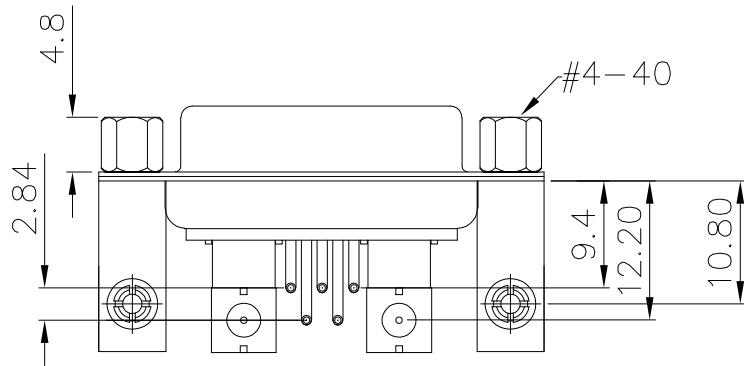

High frequency contact characteristic
impedance: 50Ω
Withstanding voltage: 300V
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +125°C
ROHS compliant

7	Screw	Steel	Plating: Ni
6	Board lock	Copper alloy	Plating: Sn
5	Bracket	Steel	Plating: Ni
4	Housing	PBT(UL94V-0)	Color: black
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: Full Au 1u"
Item	Desc.	Material	Remark


△			
△	2025/08/20	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	

QUALITY SYMBOLS

□: ☒: △: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

7W2 female coaxial right angle, riveted
10.80mm insert, lock 4.8mm screw

PART NO.

B08-7W26115D-0S

REV:

A UNIT: mm DRW BY

CHK BY

APP BY DRAWING NO.

SCALE:

N:1 DATE: 2025/08/20 Huangmei

Carl Hu

B08-171

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770