


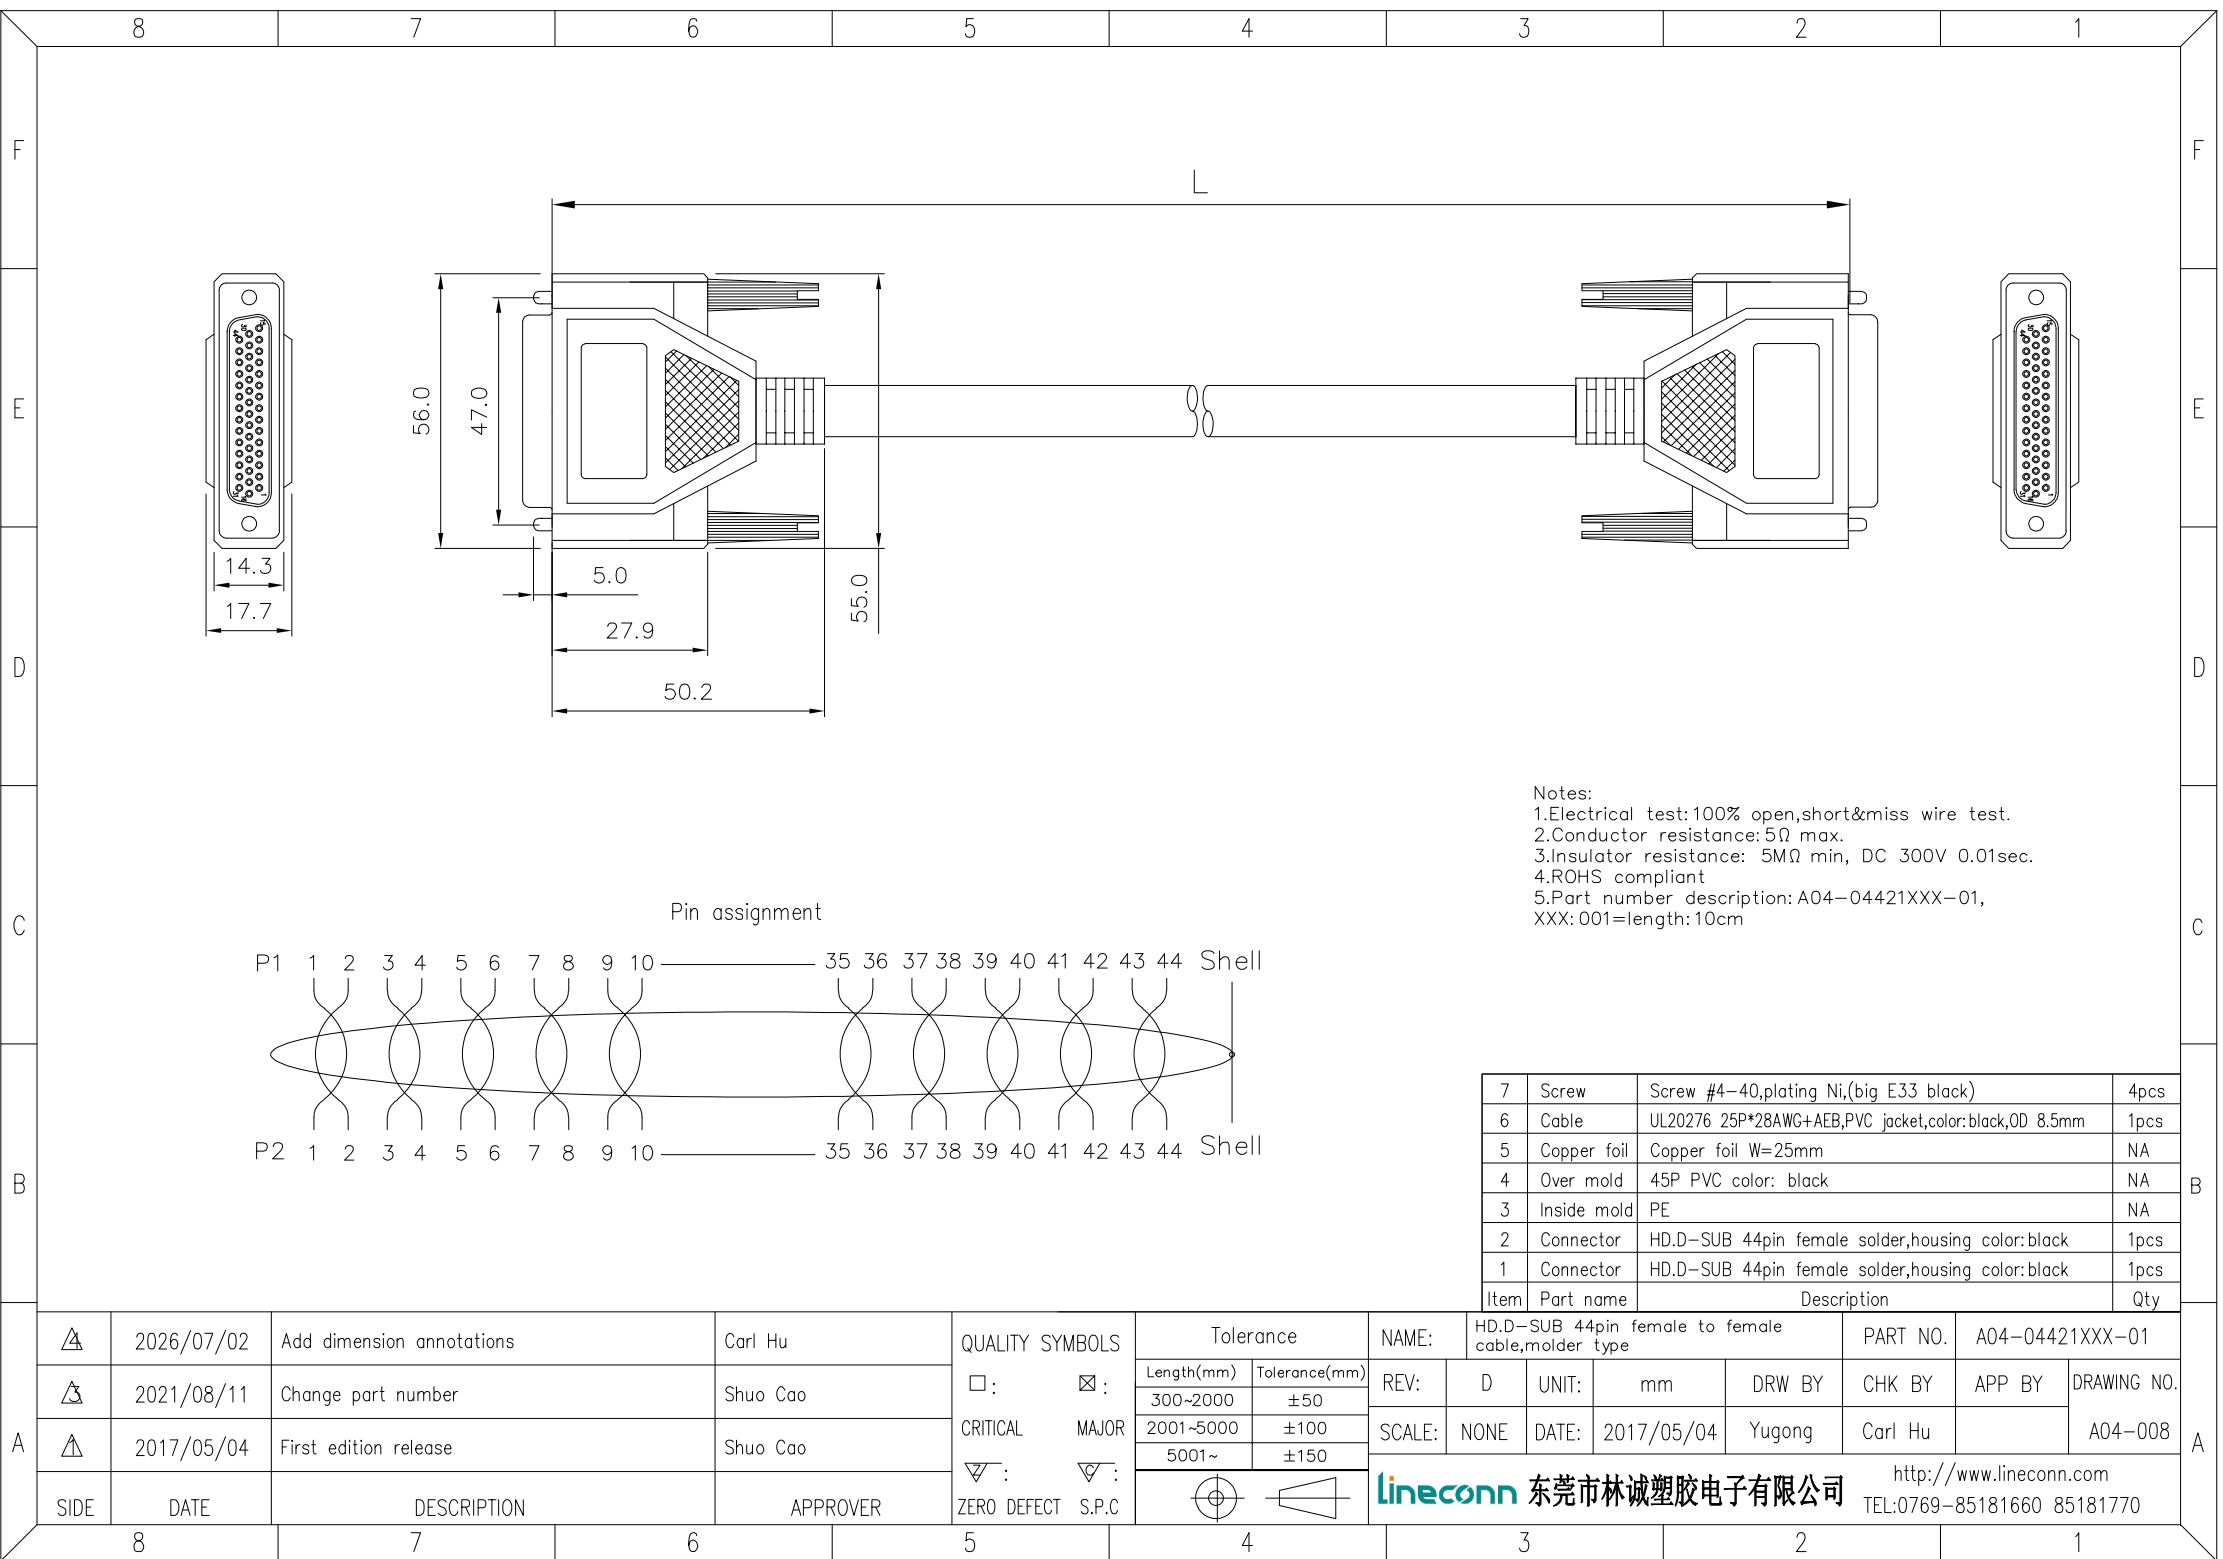

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description:A04-04421XXX-01,
XXX: 001=length:10cm

7	Screw	Screw #4-40,plating Ni,(big E33 black)	4pcs
6	Cable	UL20276 25P*28AWG+AEB,PVC jacket,color:black,OD 8.5mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 44pin female solder,housing color:black	1pcs
1	Connector	HD.D-SUB 44pin female solder,housing color:black	1pcs
Item	Part name	Description	Qty

△	2026/07/02	Add dimension annotations	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		HD.D-SUB 44pin female to female cable,molder type			PART NO.		A04-04421XXX-01		
△	2021/08/11	Change part number	Shuo Cao		Length(mm)	Tolerance(mm)	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
△	2017/05/04	First edition release	Shuo Cao		300~2000	±50	SCALE:	NONE	DATE:	2017/05/04	Yugong	Carl Hu		A04-008		
					2001~5000	±100										
					5001~	±150	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com									
SIDE	DATE	DESCRIPTION	APPROVER	TEL:0769-85181660 85181770												