



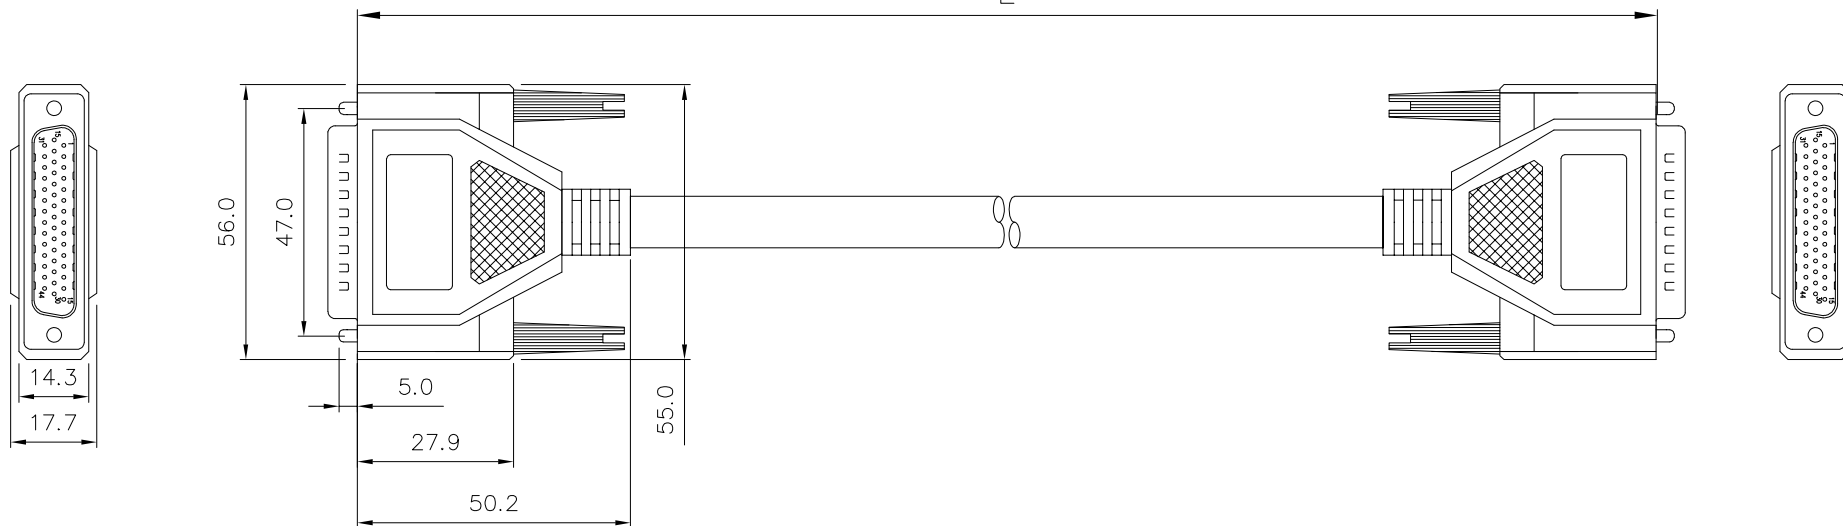

Pin assignment

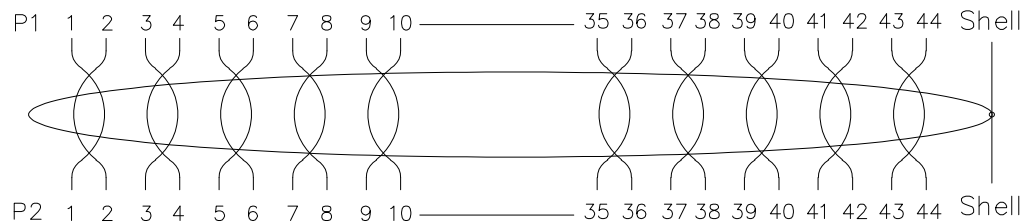

- Notes:
- 1.Electrical test:100% open,short&miss wire test.
 - 2.Conductor resistance:5Ω max.
 - 3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
 - 4.ROHS compliant
 - 5.Part number description: A04-04411XXX-01, XXX: 001=length: 10cm

7	Screw	Screw #4-40,plating Ni,(big E33 black)	4pcs
6	Cable	UL20276 25P*28AWG+AEB,PVC jacket,color:black,OD 8.5mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 44pin male solder,housing color:black	1pcs
1	Connector	HD.D-SUB 44pin male solder,housing color:black	1pcs
Item	Part name	Description	Qty

	2026/07/02	Add dimension annotations	Carl Hu	QUALITY SYMBOLS ☐ : ☒ : CRITICAL MAJOR : : ZERO DEFECT S.P.C	Tolerance		NAME:		HD.D-SUB 44pin male to male cable,molder type				PART NO.		A04-04411XXX-01	
	2021/08/11	Change part number	Shuo Cao		Length(mm)	Tolerance(mm)	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2017/05/04	First edition release	Shuo Cao		300~2000	±50	SCALE:	NONE	DATE:	2017/05/04	Yugong	Carl Hu				
					2001~5000	±100										
					5001~	±150										
SIDE	DATE	DESCRIPTION	APPROVER	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770												