


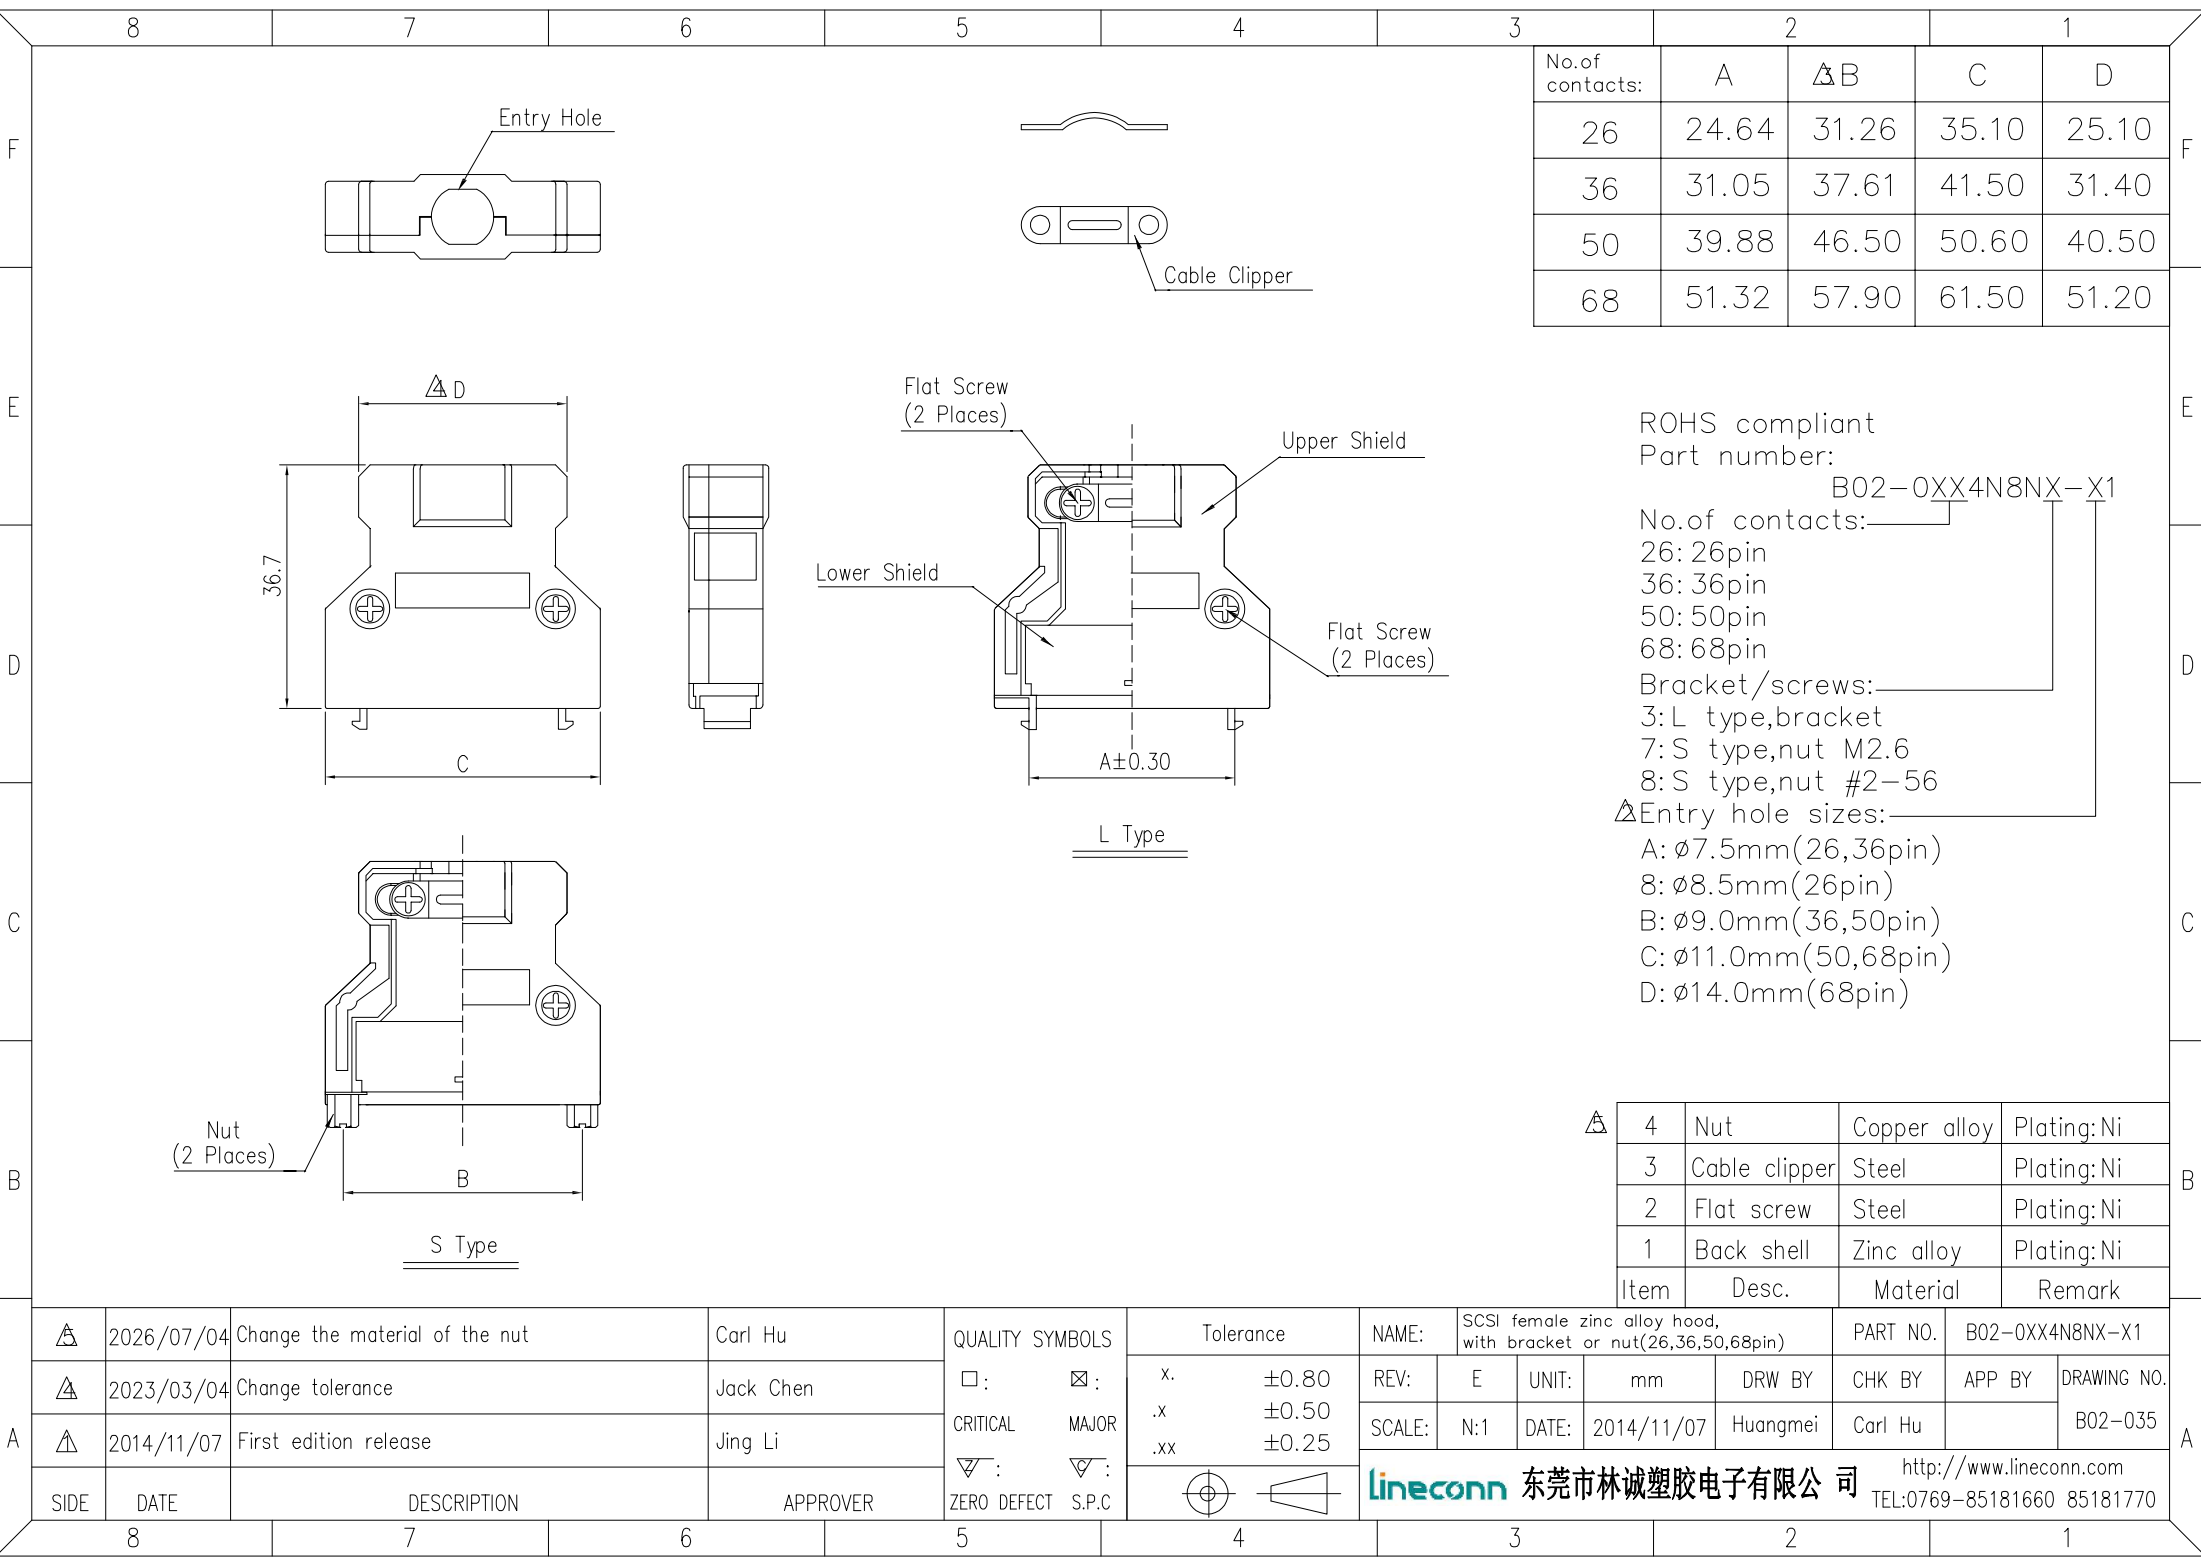

No.of contacts:	A	ΔB	C	D
26	24.64	31.26	35.10	25.10
36	31.05	37.61	41.50	31.40
50	39.88	46.50	50.60	40.50
68	51.32	57.90	61.50	51.20

ROHS compliant
Part number: B02-0XX4N8NX-X1
No.of contacts: _____
26: 26pin
36: 36pin
50: 50pin
68: 68pin
Bracket/screws: _____
3: L type, bracket
7: S type, nut M2.6
8: S type, nut #2-56
ΔEntry hole sizes: _____
A: ø7.5mm(26, 36pin)
8: ø8.5mm(26pin)
B: ø9.0mm(36, 50pin)
C: ø11.0mm(50, 68pin)
D: ø14.0mm(68pin)

Δ 4	Nut	Copper alloy	Plating: Ni
3	Cable clipper	Steel	Plating: Ni
2	Flat screw	Steel	Plating: Ni
1	Back shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

	2026/07/04	Change the material of the nut	Carl Hu	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:		SCSI female zinc alloy hood, with bracket or nut(26,36,50,68pin)				PART NO.		B02-0XX4N8NX-X1			
	2023/03/04	Change tolerance	Jack Chen		x.	±0.80	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-035				
	2014/11/07	First edition release	Jing Li		.x	±0.50	SCALE:	N:1	DATE:	2014/11/07	Huangmei	Carl Hu						
					.xx	±0.25									lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770			
SIDE	DATE	DESCRIPTION	APPROVER															