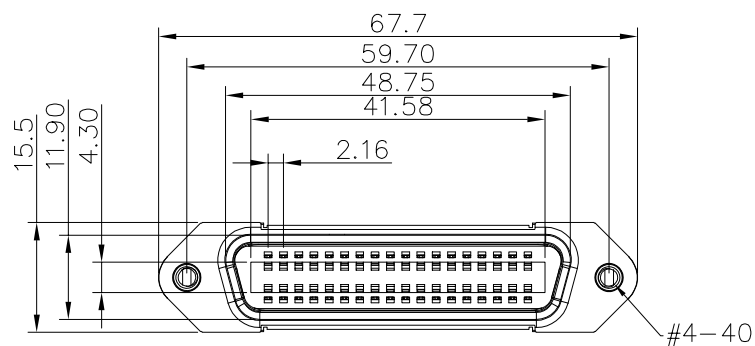


Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +105°C
ROHS compliant
Part number:

B17-0368X1AD-CB

Housing color: _____

1: Black

6: Blue

4	Board lock	Copper alloy	Plating: Ni
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Sheel	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME: Centronics(57) 36pin female vertical for PCB, rear riveted 6.1mm board lock				PART NO.		B17-0368X1AD-CB	
				□: ☒:	x.	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2021/12/24	Huangmei	Carl Hu		B17-036
				▽: ▽:	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
				ZERO DEFECT S.P.C	 									
SIDE	DATE	DESCRIPTION		APPROVER										
△	2021/12/24	First edition release		Carl Hu										