
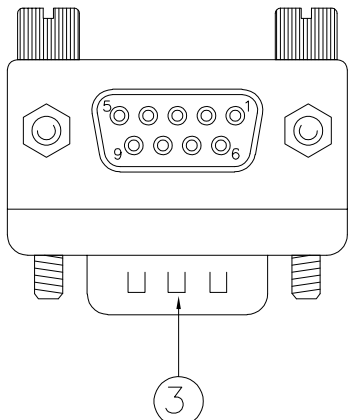
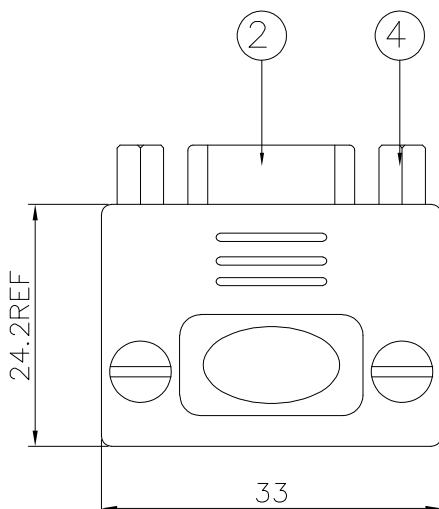
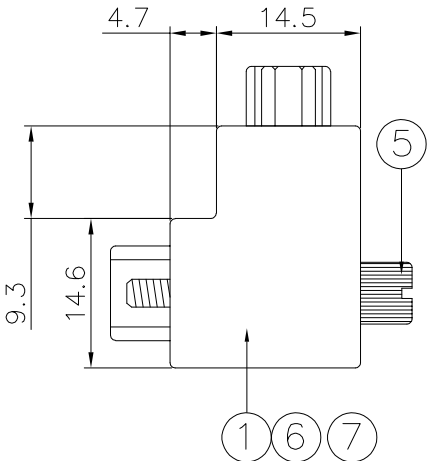




Pin assignment

P1	P2
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
Shell	Shell

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Current rating:3A
3.Conductor resistance: 3Ω max.
4.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
5.ROHS compliant

7	Over mold	45P PVC,black	NA
6	Inside mold	PE	NA
5	Screw	#4-40,steel,plated nickel	2pcs
4	Nut	#4-40,steel,plated nickel	2pcs
3	Connector	D-SUB 9pin male solder,housing color:blue	1pcs
2	Connector	D-SUB 9pin female solder,housing color:blue	1pcs
1	Cable	UL1061, 28AWG, insulation color:black, OD:1.0mm	NA
Item	Part name	Description	Qty

△			
△			
△	2024/06/03	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	D-SUB 9pin male to female adaptor,270°				PART NO.	C05-009311AD-R2		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2024/06/03	Huangmei	Carl Hu		C05-018	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			