



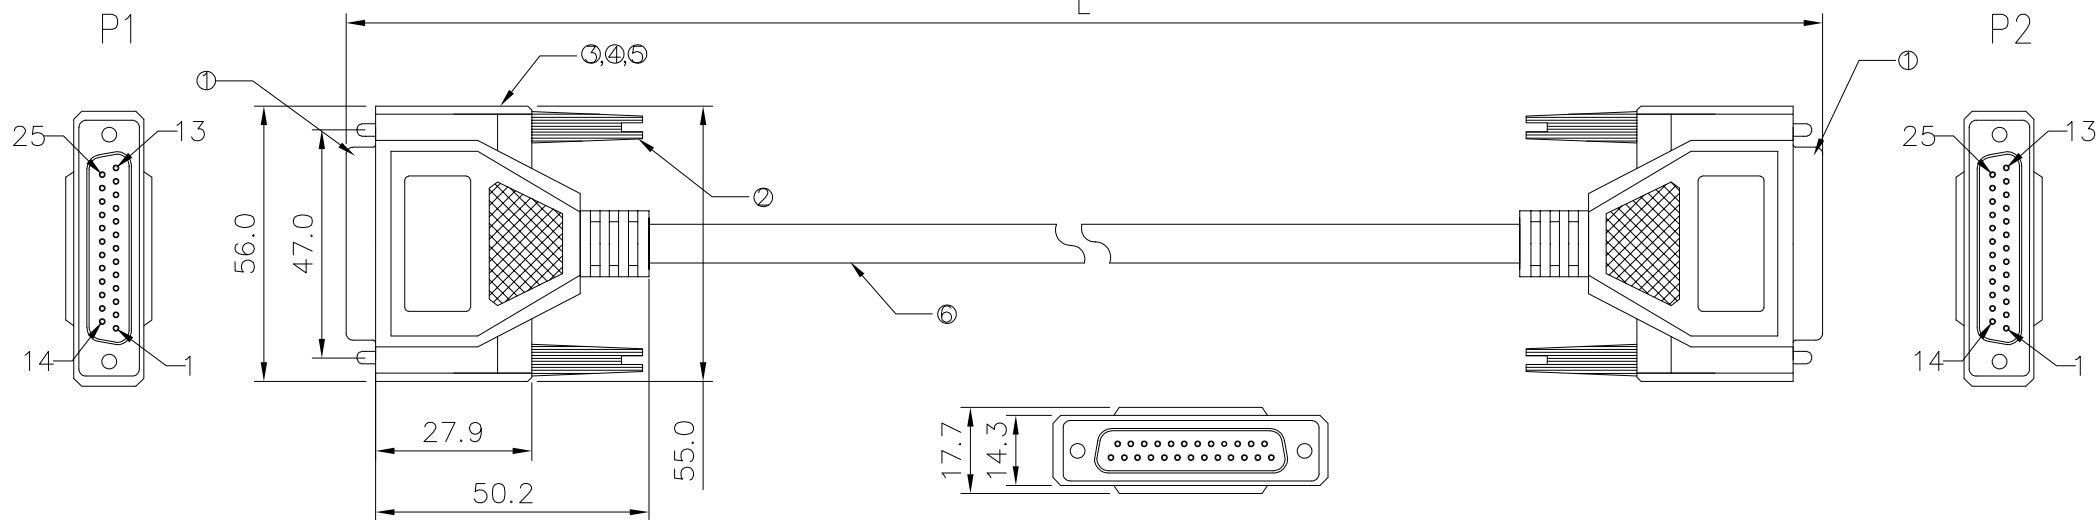

Pin assignment

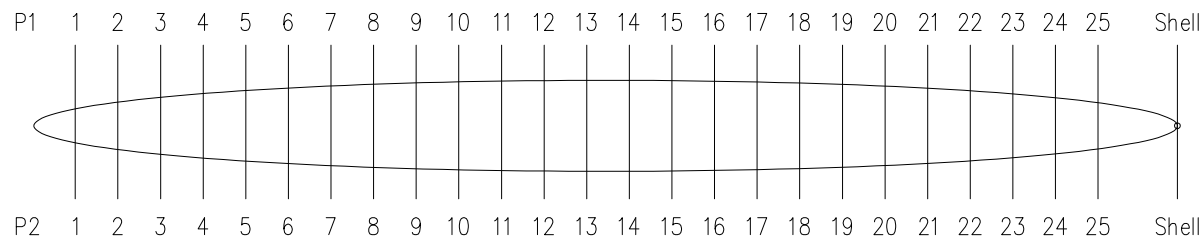

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description:A05-02521XXX-01,
XXX:001=length:10cm

6	Cable	UL2464 25C*24AWG+ABD PVC jacket color:black OD 9.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color:black	NA
3	Inside mold	PE	NA
2	Screw	Screw #4-40,plated Ni(big E33BK)	4pcs
1	Connector	D-SUB 25pin female solder,color:black	2pcs
Item	Part name	Description	Qty

△				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB 25Pin female to female cable,molder type,25C*24awg+ABD			PART NO.	A05-02521XXX-03		
△	2026/06/22	Modify the shape, Add dimension annotations	Carl Hu	□: ☒:	Length(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2022/11/03	First edition release	Shuo Cao	CRITICAL MAJOR	300~2000	SCALE:	NONE	DATE:	2022/11/03	Yugong	Carl Hu		A05-037
				▽: ▽:	2001~5000								
				ZERO DEFECT S.P.C	5001~								
SIDE	DATE	DESCRIPTION	APPROVER										
8	7	6	5	4	3	2	1						