



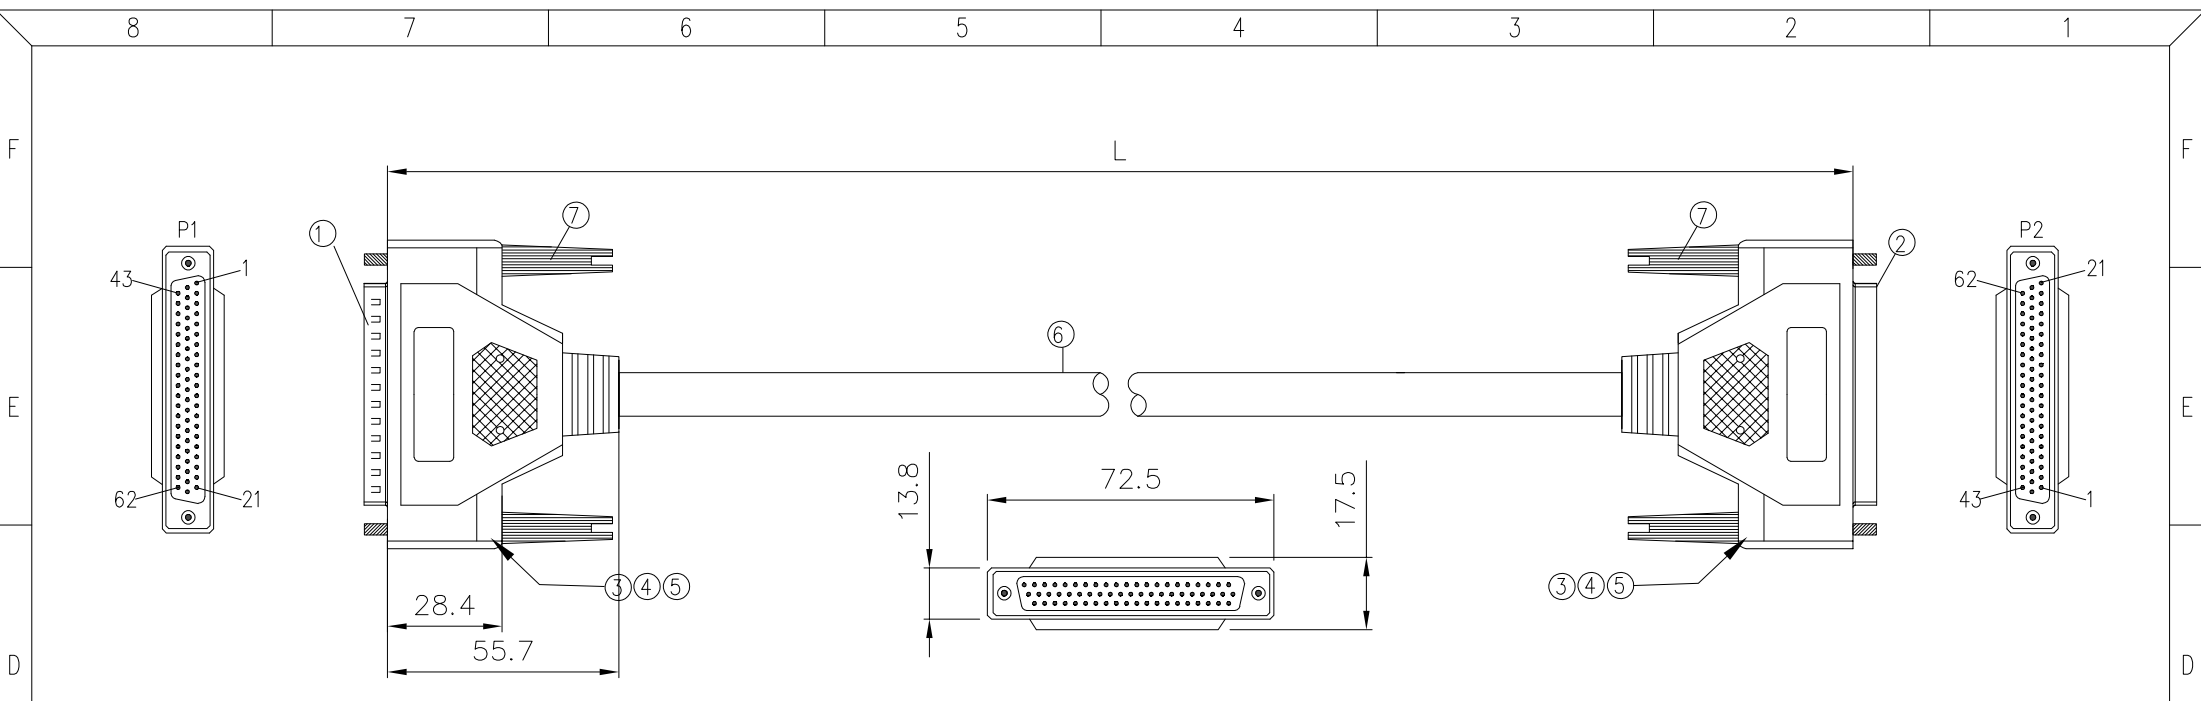

Pin assignment

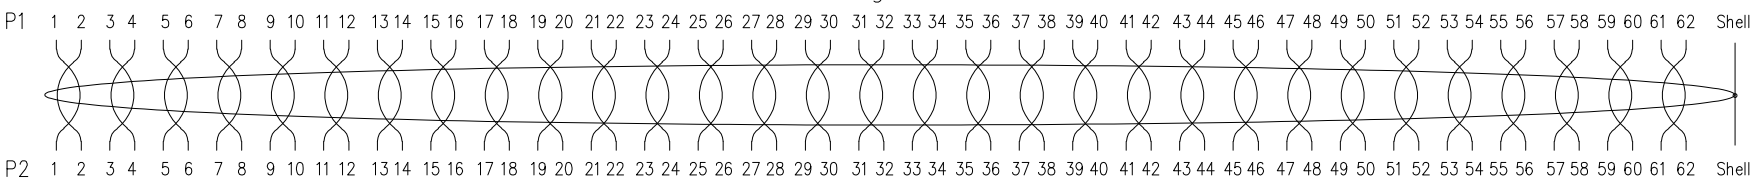

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description: A04-06231XXX-A1,
XXX: 001=length: 10cm

7	Screw	Screw #4-40 Ni(big E33 black)	4pcs
6	Cable	UL20276 28AWG*31P+AEB,PVC jacket,color black, OD 10.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 62pin female solder,housing color black	1pcs
1	Connector	HD.D-SUB 62pin male solder,housing color black	1pcs
Item	Part name	Description	Qty

A					QUALITY SYMBOLS	Tolerance		NAME:	HD.D-SUB 62pin male to female cable			PART NO.	A04-06231XXX-A1			A
					□ : ☒ :	Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
		2025/01/12	First edition release	Carl Hu	CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2025/01/12	Yugong	Carl Hu		A04-032	
					▽ : ▽ :	2001~5000	±100	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
					5001~	±150										
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C											
8		7		6		5		4		3		2		1		