
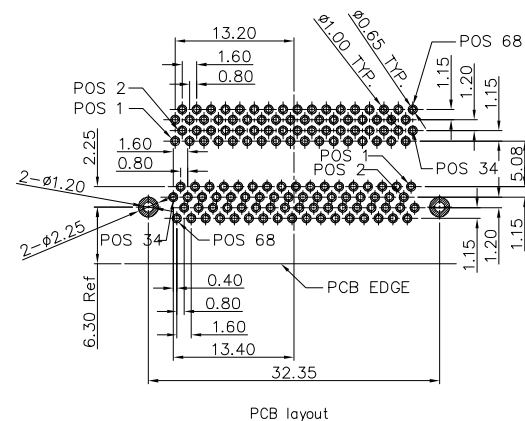

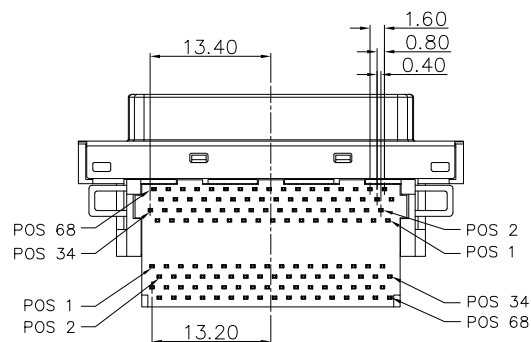
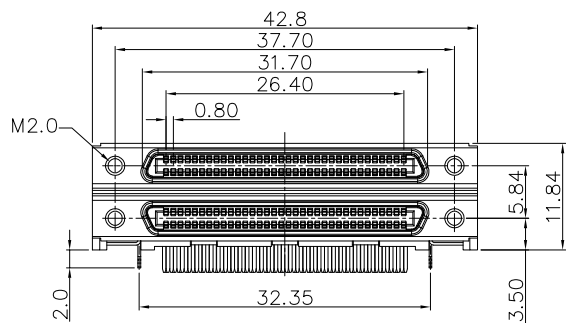


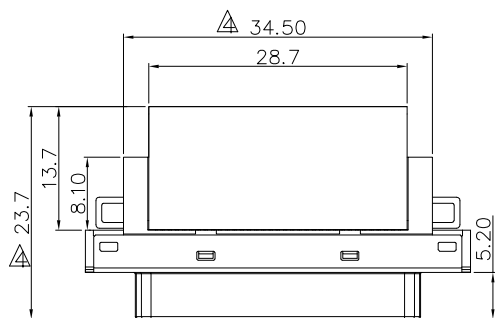


Current rating: 0.5A
Withstanding voltage: 500V
Insulation resistance: 500M Ω Min.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

5	Board lock	Copper alloy	Plating: Ni
4	Cover	Thermoplastic	Color: black
3	Housing	Thermoplastic	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2026/08/05	Add grounding and modify dimensions	Carl Hu
△	2023/11/21	Change current rating	Jack Chen
△	2022/03/08	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:	VHDCI 68pin female double right angle, with board lock			PART NO.	B06-136B11AA-02		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/08	Huangmei	Carl Hu		B06-022
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL: 0769-85181660 85181770			