



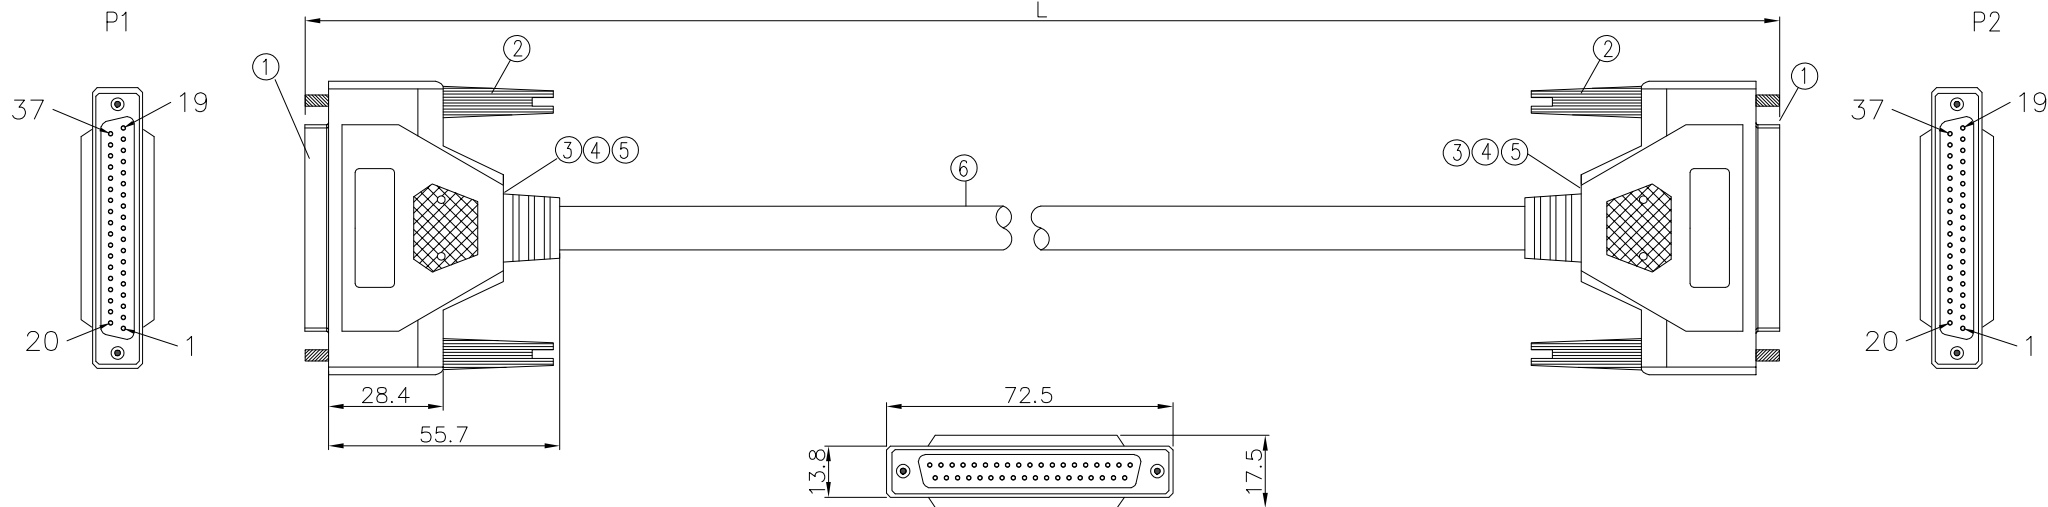

Pin assignment

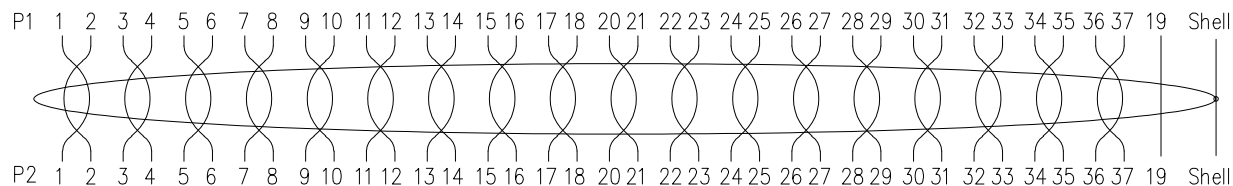

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5Ω max.
- 3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A05-03721XXX-01, XXX: 001=length:10cm

6	Cable	UL20276 18P*28AWG+1C*28AWG+AED,PVC jacket,color:black OD 8.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Screw	Screw #4-40 Ni(big E33 BK)	4pcs
1	Connector	D-SUB 37pin female solder,housing color:black	2pcs
Item	Part name	Description	Qty

Δ	2022/04/19	Change appearance	Carl Hu
Δ	2021/07/11	Change part number	Carl Hu
Δ	2018/01/06	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	Length(mm)	Tolerance(mm)
CRITICAL	MAJOR	300~2000	±50
		2001~5000	±100
		5001~	±150
▽:	▽:		
ZERO DEFECT	S.P.C		

NAME:	D-SUB 37pin female to female cable				PART NO.	A05-03721XXX-01		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	NONE	DATE:	2018/01/06	Yugong	Carl Hu		A05-014	
				东莞市林诚塑胶电子有限公司				http://www.lineconn.com
				TEL:0769-85181660 85181770				