



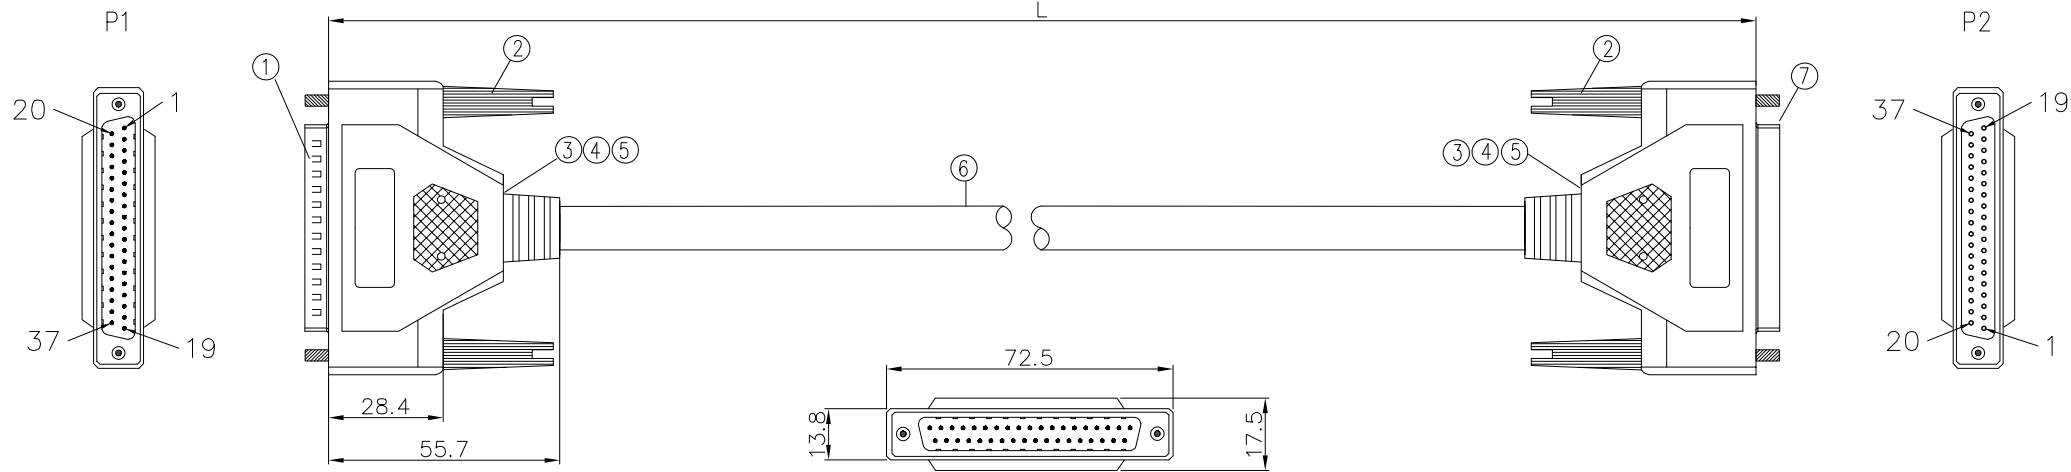

Pin assignment

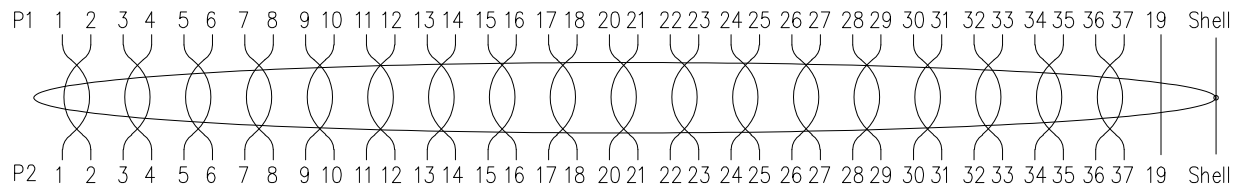

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description: A05-03731XXX-01,
XXX: 001=length:10cm

7	Connector	D-SUB 37pin female solder,housing color:black	1pcs
6	Cable	UL20276 18P*28AWG+1C*28AWG+AED,PVC jacket,color:black OD 8.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Screw	Screw #4-40 Ni(big E33 BK)	4pcs
1	Connector	D-SUB 37pin male solder,housing color:black	1pcs
Item	Part name	Description	Qty

	2022/04/19	Change appearance	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	D-SUB 37pin male to female cable				PART NO.	A05-03731XXX-01		
	2021/07/11	Change part number	Carl Hu		Length(mm)	Tolerance(mm)	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	2018/01/06	First edition release	Jack Chen		300~2000	±50	SCALE:	NONE	DATE:	2018/01/06	Yugong	Carl Hu			
					2001~5000	±100								5001~	±150
SIDE	DATE	DESCRIPTION	APPROVER	 	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770										
8		7	6	5	4		3			2			1		

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770