
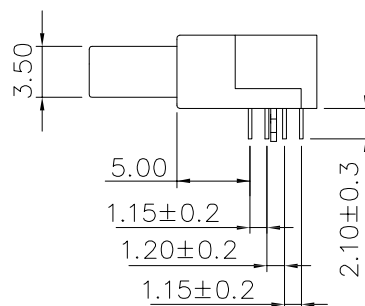
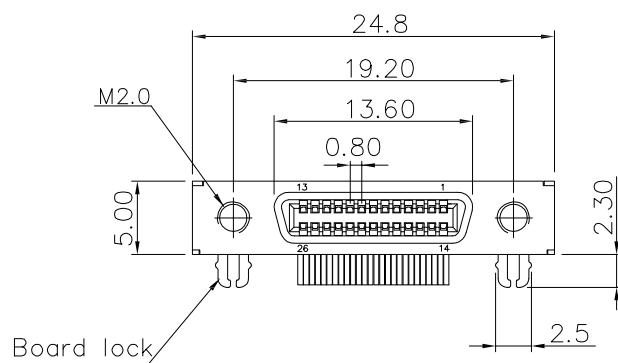
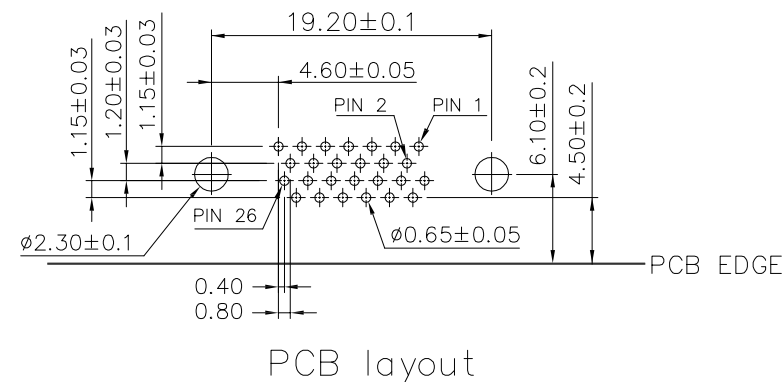




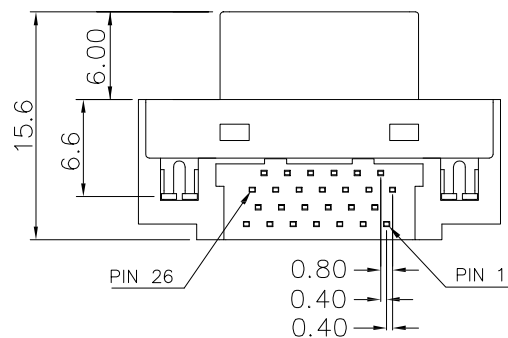

Contact current voltage:125V AC
Current rating:0.5A
Insulation resistance: 1000MΩ Min
Withstanding voltage: 350V AC
Contact resistance: 70mΩ Max
Temperature range: -45°C~+105°C
ROHS compliant

6	Nut	Copper alloy	Plating: Ni
5	Board lock	Copper alloy	Plating: Ui
4	Cover	PA 9T+33%GF	Color: black
3	Housing	PA 9T+33%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 30u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	SDR pitch 0.8mm female 26pin right angle			PART NO.	B06-026611KA-02		
△	2023/04/09	Changed the contact current voltage	Jack Chen	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2022/11/21	First edition release	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2022/11/21	Huangmei	Jack Chen		B06-030
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
8	7	6	5	4	3	2	1	TEL:0769-85181660 85181770					