



Thread Hole  
(2 Places)

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B03-020411EB-0X

BRACKET FINISHES:

- L:LATCH BRACKET
- S:SCREW BRACKET

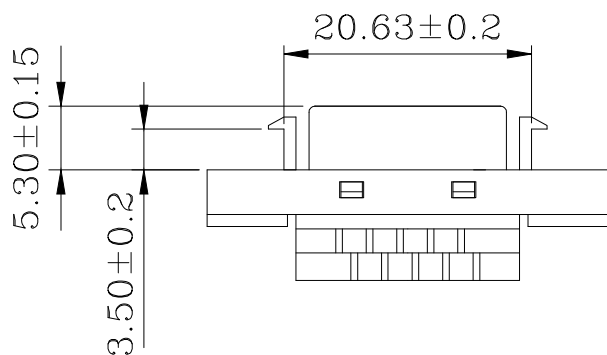

5	BRACKET	SPCC	PLATING:Ni
4	COVER	PBT+30%GF	COLOR:BLACK
3	HOUSING	PBT+30%GF	COLOR:BLACK
2	SHELL	SPCC	PLATING:Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni
ITEM	DESC.	MATERIAL	REMARKS

QUALITY SYMBOLS

□:      ☒:      CRITICAL      MAJOR  
 ▽:      ▽:      ZERO DEFECT      S.P.C

Tolerance

x.      ±0.50  
 .x      ±0.30  
 .xx      ±0.25

NAME:

SCSI 20P FEMALE SOLDER MOLDED TYPE  
(客户用图)

PART NO.

B03-020411EB-0X

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2011/07/29

Jack Chen

Dean Fan

B03-092

lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

△	2011/07/29	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER