


RoHS

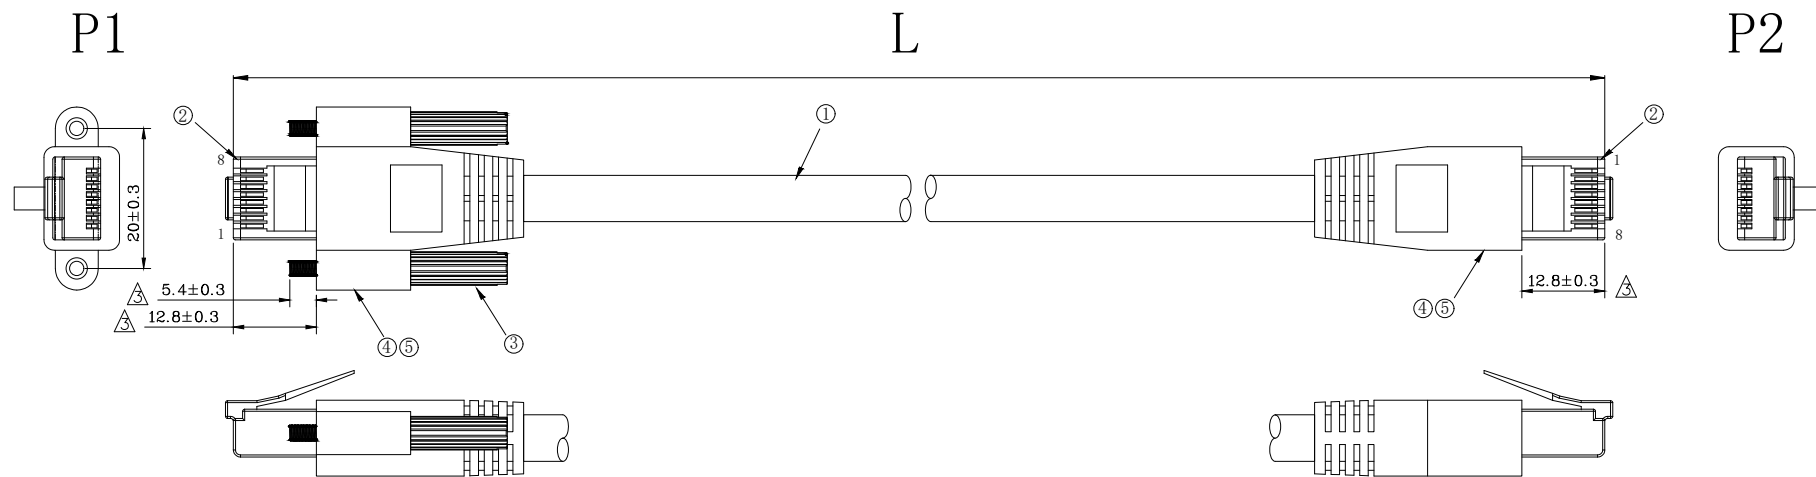

CONNECTION

P 1		P 2
1	ORANGE / WHITE	1
2	ORANGE	2
3	GREEN / WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE / WHITE	5
7	BROWN / WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

NOTES:


1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.



型号	线材规格	长度(dm)
A10-00811XXX-02	黑色普通线4P*24AWG OD 6.0mm	XXX:001=1dm
A10-00811XXX-01	黑色拖链线4P*24AWG OD 6.0mm	
A10-00813XXX-02	绿色普通线4P*24AWG OD 6.0mm	XXX:010=10dm
A10-00813XXX-01	绿色拖链线4P*24AWG OD 6.0mm	
A10-00811XXX-11	黑色拖链线4P*26AWG OD 6.0mm	
A10-00818XXX-12	黄色普通线4P*26AWG OD 6.5mm	

5	OVERMOLD	PVC 45P COLOR:BLACK	
4	MOLD	LDPE, TRANSPARENT	
3	SCREW	M2.0*0.4 1215GREEN STEEL, NI PLATING.	2PCS
2	CONN	RJ45 CONNECTOR, 8P8C. WITH SHELL.	2PCS
1	CABLE	千兆工业网线4P, 双屏蔽(其他参数见料号规格说明)	
ITEM	PART NAME	DESCRIPTION	QY' T

△	2023/07/27	修正尺寸	Huangmei	QUALITY SYMBOLS □ :    ☒ : CRITICAL MAJOR ▽ :    ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:	工业相机网线ECS-GR-XM(螺丝固定型) (客户用图)			PART NO.	A10-0081X XXX-XX		
△	2021/04/16	增加线材规格	Huangmei		尺寸(MM)	公差(MM)	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2018/09/11	新版发行	Jing Li		300~2000	±50	SCALE:	NONE	DATE:	2018/09/11	Huangmei	Jack Chen		A10-001
SIDE	DATE	DESCRIPTION	APPROVER											



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
TEL:0769-85181660 85181770